

SABEA

Ready Mix

Absolute Quality Concrete



Main Office: Industrial Area St. 48 Gate No. 283 - P.O. Box: 82614 Doha, Qatar

Branch No. 1: Abu Glai-La Al Mazrooah / Branch No. 2: Industrial Area St. No. 39 Gate No. 64

Tel No.: +974 4492-2452 Fax No.: +974 4443-8576 Email: rmshipping@aae.com.qa / srmmazrouah@aae.com.qa

| | | Page No.'s |
|--------------------------------------------|--------------------------------------------------------------|----------------|
| Introductions Mission and Visions | Mission and Visions | 1 - 2 |
| Quality and HSE Policy | I.S.O. Certificates | 3 |
| Quality Management System | Structures, Customer Diagram | 4 - 6 |
| Organization Chart | Chart and QA/QC Structure | 7 - 8 |
| Official Documents | CR, CRC, Environmental and Chambers of Commerce | 9 - 12 |
| Accreditation and Certifications | QGOS and NRMCA | 13 - 17 |
| Batching Plants and Equipment's | Plants Locations and Production Capacity | 18 - 19 |
| Equipment's, Fleets and Machineries | Vehicles Technical Information and Laboratory Equipment's | 20 - 23 |
| Quality Control | Batching Process, Quality, Material and Operational Plans | 24 - 28 |
| Raw Materials | Aggregates and Cementitious Materials | 29 |
| Projects List and References | Project Name, Locations and Bill of Quantity | 30 - 39 |
| Casting Gallery | Concrete Raft, Slab, Pipeline Work and Slip Form | 40 - 45 |
| ASHGHAL Approval | Approved Ready-Mix Concrete Supplier | 46 |
| Project Approvals | Consultant, Project Managements and Clients | 47 - 48 |
| Appreciations Letter | Letter from the Main Contractor | 49 |
| Contact Reference | Plants, Operations, Production and Sales Contact Information | 50 - 51 |

SABEA READY MIX was established as a key component of the natural expansion strategy of Al Ali Engineering Co, W.L.L. a renowned construction company with a diverse portfolio of activities in the State of Qatar.

Since its founding in 2009, SABEA READY MIX has experienced steady growth, evolving into one of the leading ready-mix concrete suppliers in the region. The company has made significant contributions to the economic development of Qatar, providing essential materials for various infrastructure projects.

With strategically located facilities at Industrial Area St. 48, Industrial Area St. 39, and Abu Glai La Al Mazrooah in Umm Salal, SABEA READY MIX is ideally positioned to serve the entire Doha area, meeting the increasing demand for high-quality concrete to support Qatar's infrastructure growth.

Our product offerings include a wide range of concrete solutions, from lean mixes using Ordinary Portland Cement to high-strength, durable concrete blends with mineral additives such as Fly Ash, GGBS, and Micro Silica. Additionally, we specialize in advanced concrete types, including formed concrete and self-compacting concrete, tailored to meet the diverse needs of our clients.

OUR MISSION

To be the market leader in the Ready-Mix Concrete industry by expanding our reach across all regions of the State of Qatar, setting new standards for quality and innovation.

OUR VISION

To meet the growing demands of the Ready-Mix Concrete industry by delivering exceptional concrete quality at competitive rates, while consistently exceeding customer expectations and adhering to the most stringent industry requirements.



Sabea Ready Mix is powered by a team of highly skilled technical and operational professionals, comparable to the best in the ready-mix concrete industry. Our expertise enables us to consistently deliver concrete that meets the most stringent specifications and schedules.


We pride ourselves on utilizing world-class equipment for the production and delivery of concrete, ensuring top-notch service and reliability.

Our fleet includes seven (7) state-of-the-art computerized batching plants from globally renowned manufacturers, such as IMER (Italy), LIEBHERR (Germany), and STETTER GmbH (Memmingen). With a daily production capacity exceeding 7,000m³, our advanced facilities, paired with a highly efficient workforce, empower Sabea Ready Mix to handle any large-scale production requirements with ease.

At Sabea Ready Mix, we use only the highest quality raw materials sourced from reputable suppliers. Our ample storage facilities ensure a continuous supply of materials, minimizing any production delays and enabling us to undertake even the most demanding projects.

Our fully equipped laboratory, staffed with qualified professionals, rigorously tests both raw materials and concrete to guarantee the highest standards of quality at every stage of production.

Sabea Ready Mix is committed to delivering superior concrete quality at competitive rates, ensuring satisfaction for all our clients.



Al Sabea for Ready Mix and Blocks

Tel No: 4492 2452 Fax No: 4443 8576
P.O. Box: 82614 Industrial Area St. No. 48, Gate No. 283

الصبيح للزدي مكس والطوبوق - فرع (دريم)

٤٤٩٢٢٤٥٢ : فاكس رقم ٤٤٤٣٨٥٧٦ : صندوق بريد ٨٢٦١٤ شارع رقم ٤٨ : بناية رقم ٢٨٣ المنطقة الصناعية


Quality Policy

Al Sabea for Ready Mix and Blocks is fully committed to delivering high-quality products and services in the most economical manner, utilizing value-added engineering and solutions to ensure the full satisfaction of our customers.

To achieve this policy, SABEA READY MIX shall establish, implement, and maintain a Quality Management System in accordance with the requirements of ISO 9001:2015. The following principles shall be established and strictly adhered to:


- **Understanding and Fulfilling Customer Requirements:** We strive to consistently provide excellent services through a highly motivated and competent team that is dedicated to meeting and exceeding customer expectations.
- **Compliance with Standards and Regulations:** We ensure the adoption and implementation of effective execution techniques and procedures that meet customer requirements and fully comply with all applicable laws, regulations, and industry standards.
- **Efficient Service Delivery:** We are committed to procuring the right materials and maintaining all equipment and infrastructure in optimal working condition to support the consistent delivery of reliable and efficient services.
- **Qualified and Skilled Workforce:** We aim to recruit highly qualified and motivated staff and continuously enhance their capabilities through targeted training and development programs, thereby sustaining the high standards of quality our customers expect.
- **Performance Optimization and Monitoring:** We maintain rigorous oversight and performance monitoring throughout the duration of our services to ensure client requirements are consistently met.
- **Continuous Improvement:** We are dedicated to ongoing improvement by identifying weaknesses, eliminating root causes, and implementing corrective actions to strengthen our operations and enhance the effectiveness of our Quality Management System.

Engr. Mohammad FA L. Al Daoudi
General Manager
Al Sabea for Ready Mix and Blocks



Quality Policy | SABEA-QP-FRM-01 Rev.02
March 04, 2023

Tel No: 4492 2452 Fax No: 4443 8576 P.O. Box: 82614 St. No. 48, Gate No. 283 INDUSTRIAL AREA
المنطقة الصناعية ٢٨٣ : بناية رقم ٤٨ : شارع رقم ٤٨ : صندوق بريد ٨٢٦١٤ : ٤٤٩٢٢٤٥٢ : فاكس رقم ٤٤٤٣٨٥٧٦



Al Sabea for Ready Mix and Blocks

Tel No: 4492 2452 Fax No: 4443 8576
P.O. Box: 82614 Industrial Area St. No. 48, Gate No. 283

الصبيح للزدي مكس والطوبوق - فرع (دريم)

٤٤٩٢٢٤٥٢ : فاكس رقم ٤٤٤٣٨٥٧٦ : صندوق بريد ٨٢٦١٤ شارع رقم ٤٨ : بناية رقم ٢٨٣ المنطقة الصناعية

QHSE Policy

At Sabea Ready Mix, we are unwavering in our commitment to uphold the highest standards of Quality, Health, Safety, and Environment (QHSE) across all operations. Our policy stands as a testament to our dedication to excellence, continual improvement, and compliance with integrated Management System (IMS) standards, including ISO 9001:2015 for Quality Management Systems (QMS), ISO 14001:2015 for Environmental Management Systems (EMS), and ISO 45001:2018 for Occupational Health and Safety Management Systems (OHSMS). We pledge to continually review and enhance our processes and systems, focusing on the following key areas:


- We pledge to establish and enhance our Integrated Management System to meet and exceed IMS requirements, ensuring continual enhancement of our processes and systems.
- Adopt and implement quality, methods, standards and defining roles, responsibilities and authorities; We are dedicated to delivering products and services that consistently meet or exceed customer expectations. Our commitment to quality is evident in our rigorous quality control processes, continuous improvement initiatives, and adherence to industry best practices.
- We will set and maintain Quality Objectives, Targets, and Management Programs at all levels, aligning them with IMS standards to drive continual improvement across our organization.
- Constantly monitor, evaluate and enhance quality performance through Quality, Health, Safety and Environmental Objectives, implementing relevant processes and activities and performance reviews; we will ensure the effectiveness of our QHSE initiatives and practices.
- We will proactively prevent pollution through the adoption of environmentally friendly practices and the promotion of responsible work behavior.
- Upholding a "Zero Injury" ethos, we have established comprehensive emergency response procedures to swiftly address incidents and accidents, including fires, chemical spills, work injuries, or medical emergencies, prioritizing the safety of our employees and the surrounding community. Through rigorous operational controls and monitoring, we maintain a safe working environment, aiming to eliminate the possibility of injury and illness. We are committed to identifying and adhering to all applicable legal and regulatory requirements, ensuring full compliance with industry standards.
- We recognize the importance of fostering awareness, competence, and skills among our interested parties. Through continuous training and development programs, we will empower our employees to contribute to our QHSE objectives.
- We recognize the worker's duty to identify hazards, and supports and encourages workers to play an active role in identifying hazards and to offer suggestions or ideas to improve the health and safety program.
- Maintain effective internal and external communication including dissemination of QHSE Policy to Sabea Ready Mix- internally, interested parties and making it available to public at large.
- We will actively engage with interested parties through a structured feedback mechanism, ensuring their concerns and perspectives are acknowledged and integrated into decision-making processes effectively.
- Our commitment to environmental responsibility extends beyond compliance. We will strive to measure and reduce our environmental impact, and set annual goals to drive progress.

Engr. Mohammad FA L. Al Daoudi
General Manager
Al Sabea for Ready Mix and Blocks



QHSE-POL-01-009

Tel No: 4492 2452 Fax No: 4443 8576 P.O. Box: 82614 St. No. 48, Gate No. 283 INDUSTRIAL AREA
المنطقة الصناعية ٢٨٣ : بناية رقم ٤٨ : شارع رقم ٤٨ : صندوق بريد ٨٢٦١٤ : ٤٤٩٢٢٤٥٢ : فاكس رقم ٤٤٤٣٨٥٧٦



Certificate of Registration

This is to certify that

AL SABEA FOR READY MIX AND BLOCKS W.L.L.
Zone 57, Industrial Area St. 48, Gate No. 283, P.O Box No. 82614, Doha, Qatar.

has been assessed by RICL and found to comply with the requirements of



ISO 9001 : 2015

Quality Management Systems

For the following activities:
Production and Supply of Ready-Mix Concrete.

This Certificate is Valid from 10/04/2025 Until 19/05/2026

Date of Initial Certification: 20/05/2024
1st Surveillance Audit Successfully Conducted.
1st Surveillance on or before: 19/04/2026
Certification Valid Until: 19/05/2027

Royal Impact Certification Ltd.
Director
823, Tower-B, (Tham, Plot No. A-45, Sector - 62, Noida 201301, India.
www.riqcl.com, info@riqcl.com
Phone : +91 120 4113883

This certificate can be verified at www.riqcl.com or at www.iaf.com.
This Certificate remains the property of Royal Impact Certification Limited. Must be returned on request or if certificate is withdrawn. Validity of this certificate is subject to successful surveillance audits as per dates given above.



Certificate of Registration

This is to certify that

AL SABEA FOR READY MIX AND BLOCKS W.L.L.
Zone 57, Industrial Area St. 48, Gate No. 283, P.O Box No. 82614, Doha, Qatar.

has been assessed by RICL and found to comply with the requirements of

ISO 14001 : 2015

Environmental Management Systems

For the following activities:
Production and Supply of Ready-Mix Concrete.

This Certificate is Valid from 10/04/2025 Until 19/05/2026

Date of Initial Certification: 20/05/2024
1st Surveillance Audit Successfully Conducted.
1st Surveillance on or before: 19/04/2026
Certification Valid Until: 19/05/2027




Royal Impact Certification Ltd.
Director
823, Tower-B, (Tham, Plot No. A-45, Sector - 62, Noida 201301, India.
www.riqcl.com, info@riqcl.com
Phone : +91 120 4113883

This certificate can be verified at www.riqcl.com or at www.iaf.com.
This Certificate remains the property of Royal Impact Certification Limited. Must be returned on request or if certificate is withdrawn. Validity of this certificate is subject to successful surveillance audits as per dates given above.



Certificate of Registration

This is to certify that

AL SABEA FOR READY MIX AND BLOCKS W.L.L.
Zone 57, Industrial Area St. 48, Gate No. 283, P.O Box No. 82614, Doha, Qatar.

has been assessed by RICL and found to comply with the requirements of

ISO 45001 : 2018

Occupational Health and Safety Management Systems

For the following activities:
Production and Supply of Ready-Mix Concrete.


This Certificate is Valid from 10/04/2025 Until 19/05/2026


Date of Initial Certification: 20/05/2024
1st Surveillance Audit Successfully Conducted.
1st Surveillance on or before: 19/04/2026
Certification Valid Until: 19/05/2027






Royal Impact Certification Ltd.
Director
823, Tower-B, (Tham, Plot No. A-45, Sector - 62, Noida 201301, India.
www.riqcl.com, info@riqcl.com
Phone : +91 120 4113883


This certificate can be verified at www.riqcl.com or at www.iaf.com.
This Certificate remains the property of Royal Impact Certification Limited. Must be returned on request or if certificate is withdrawn. Validity of this certificate is subject to successful surveillance audits as per dates given above.

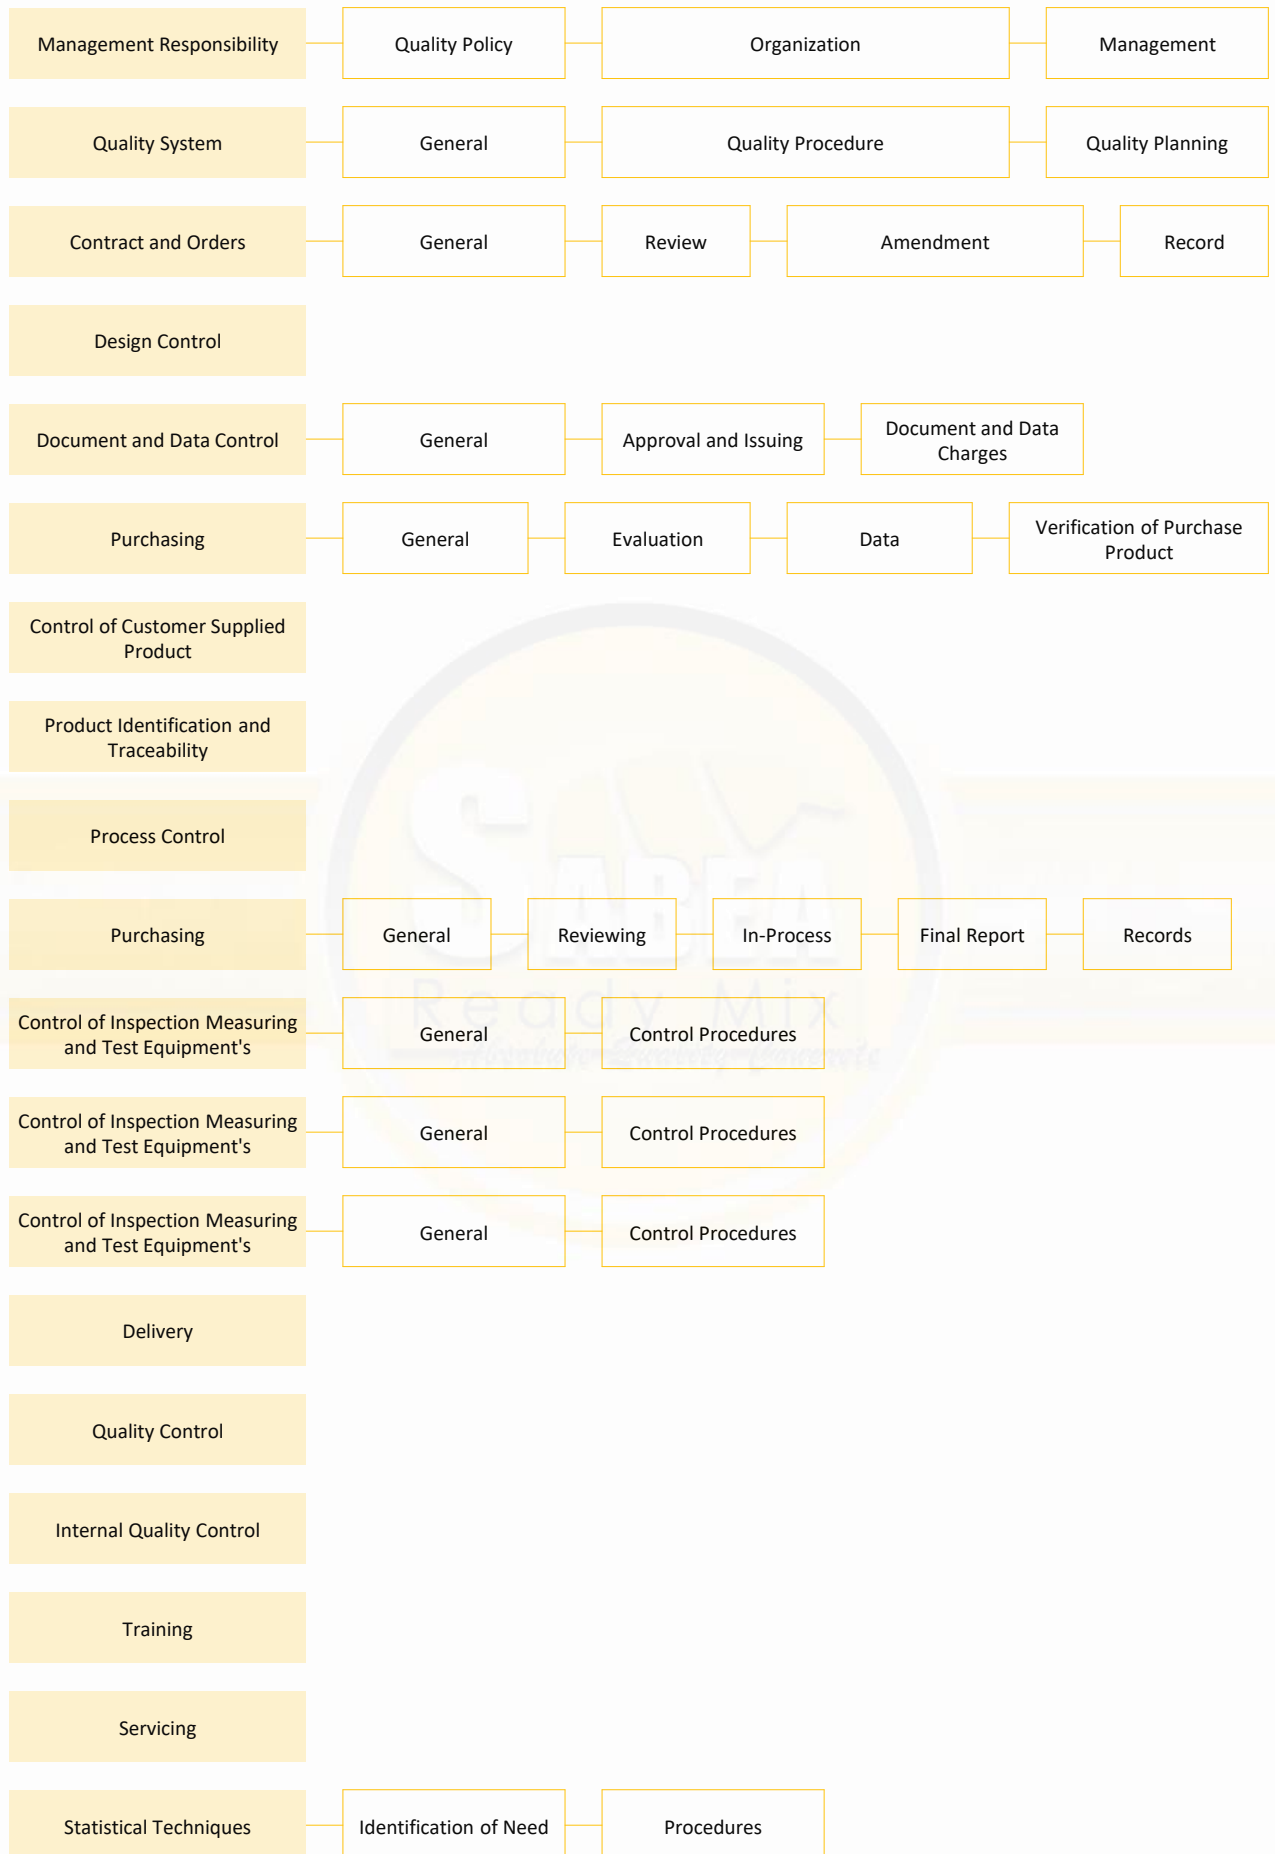

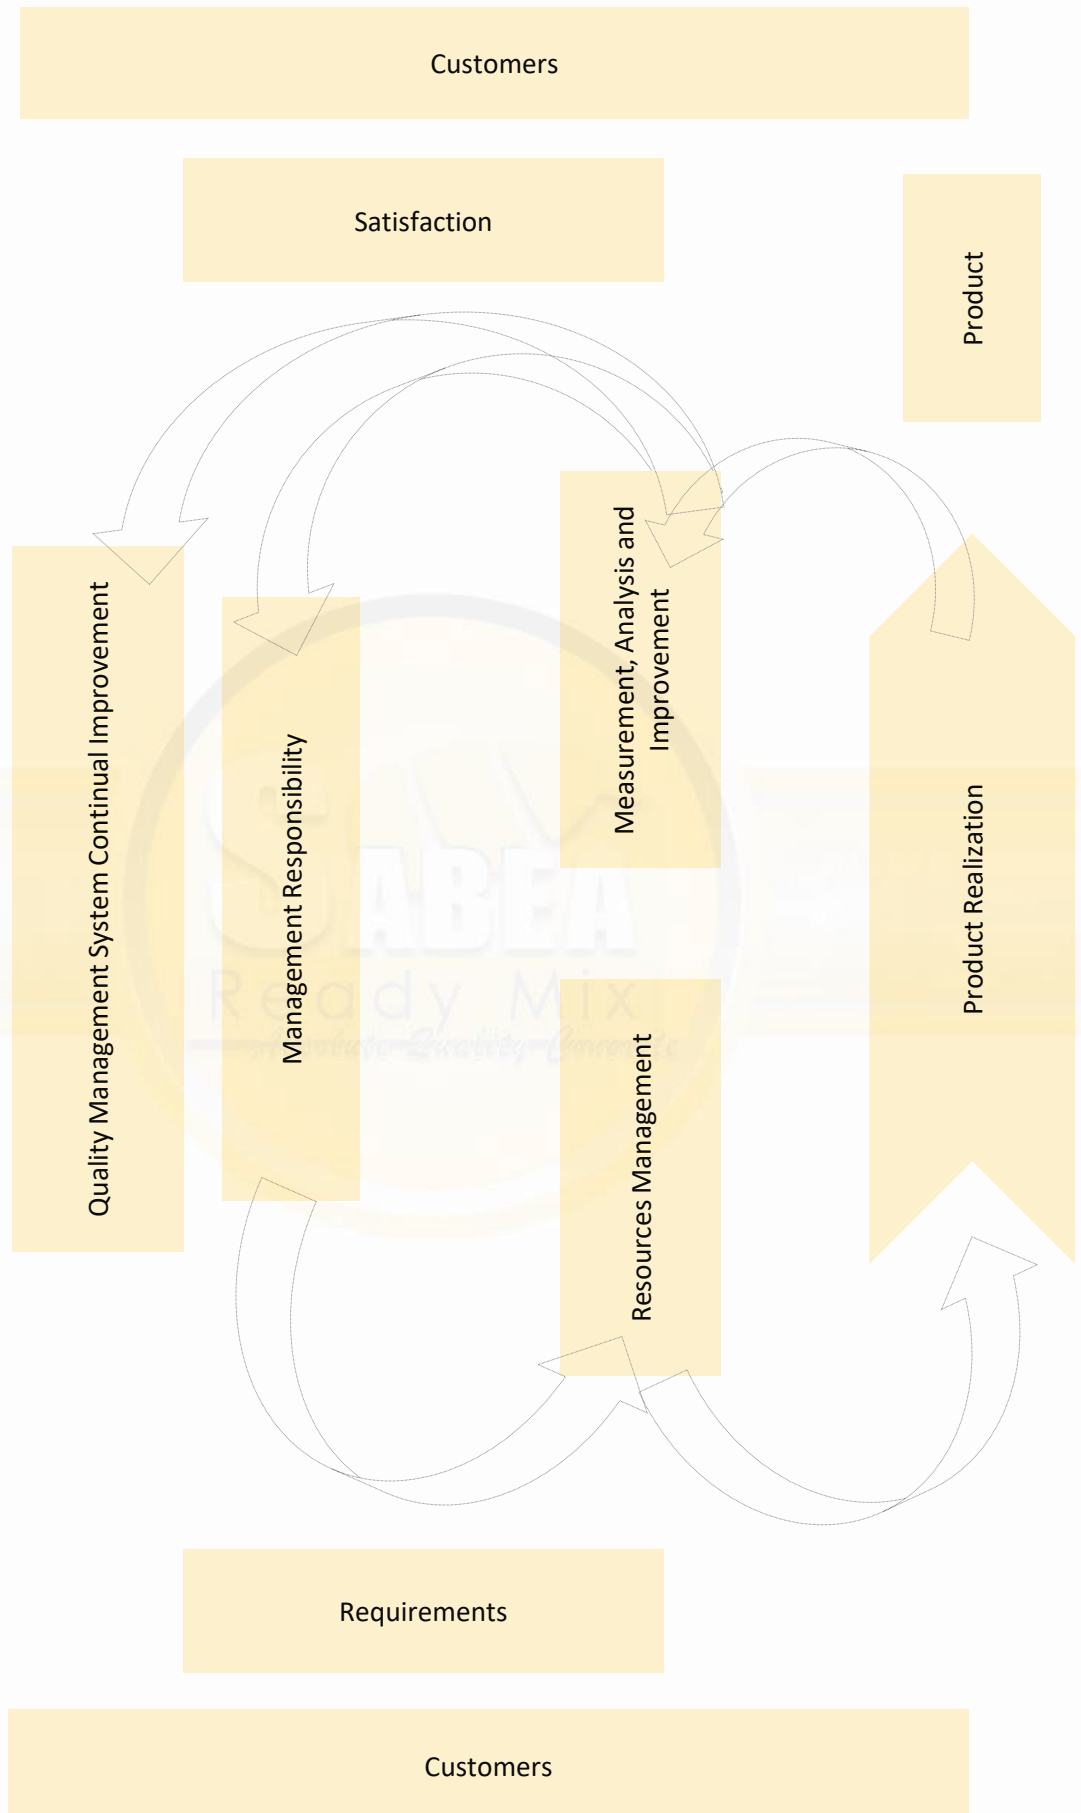

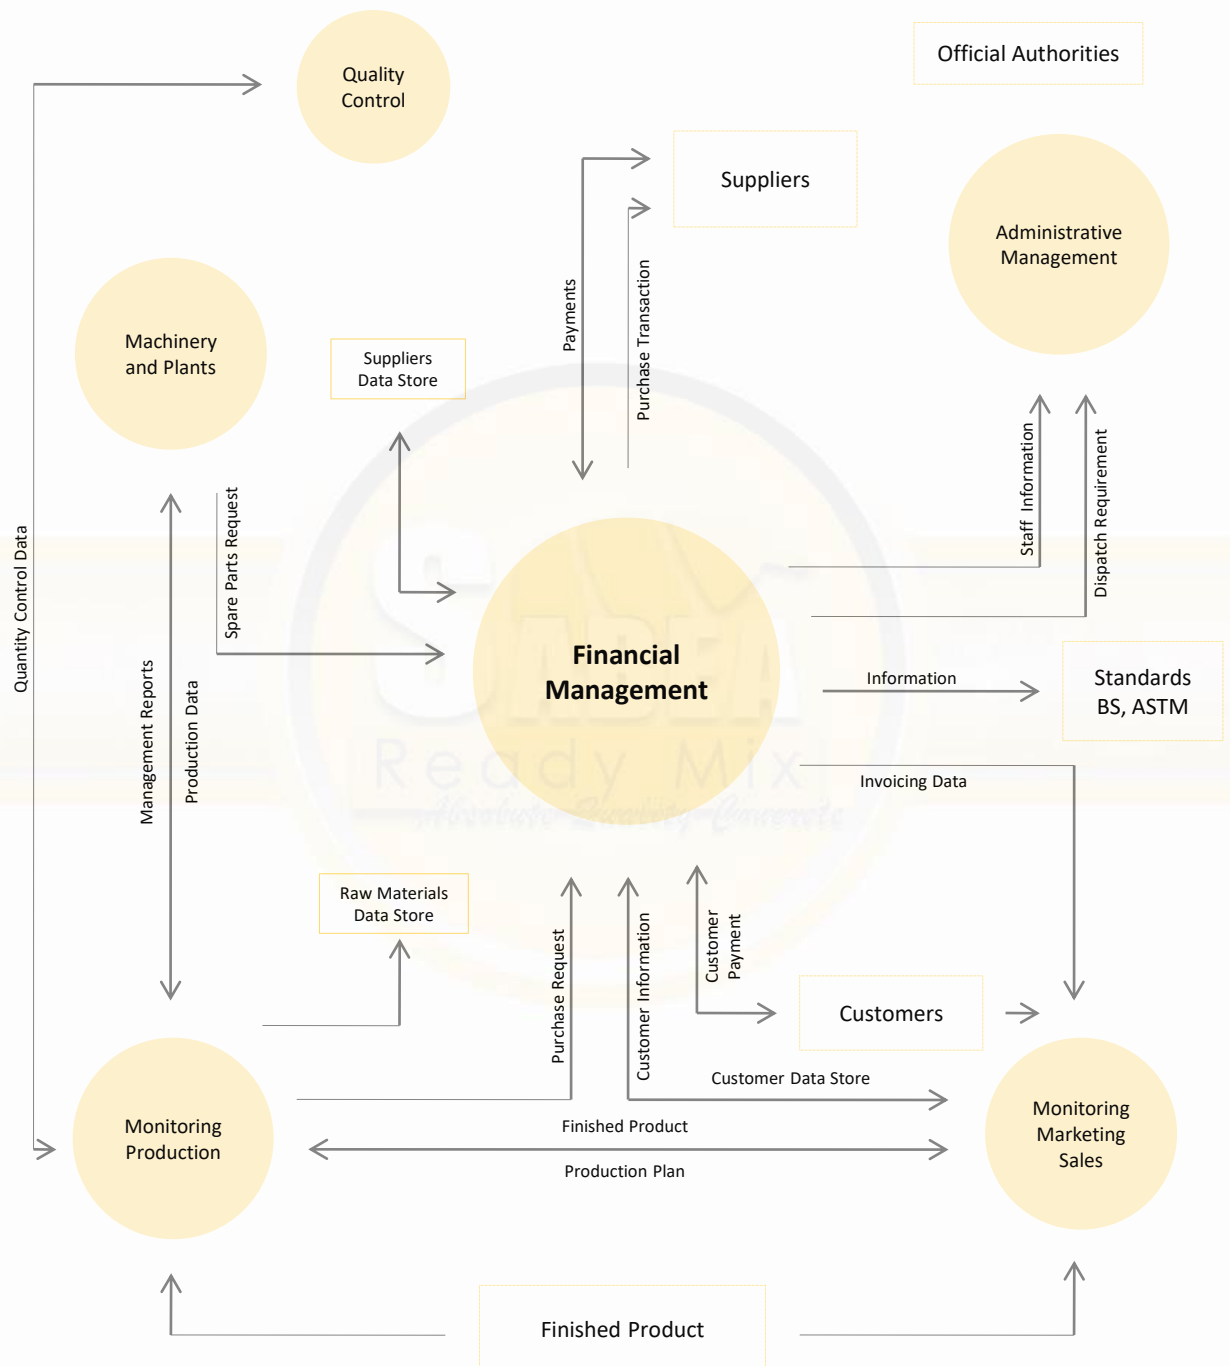

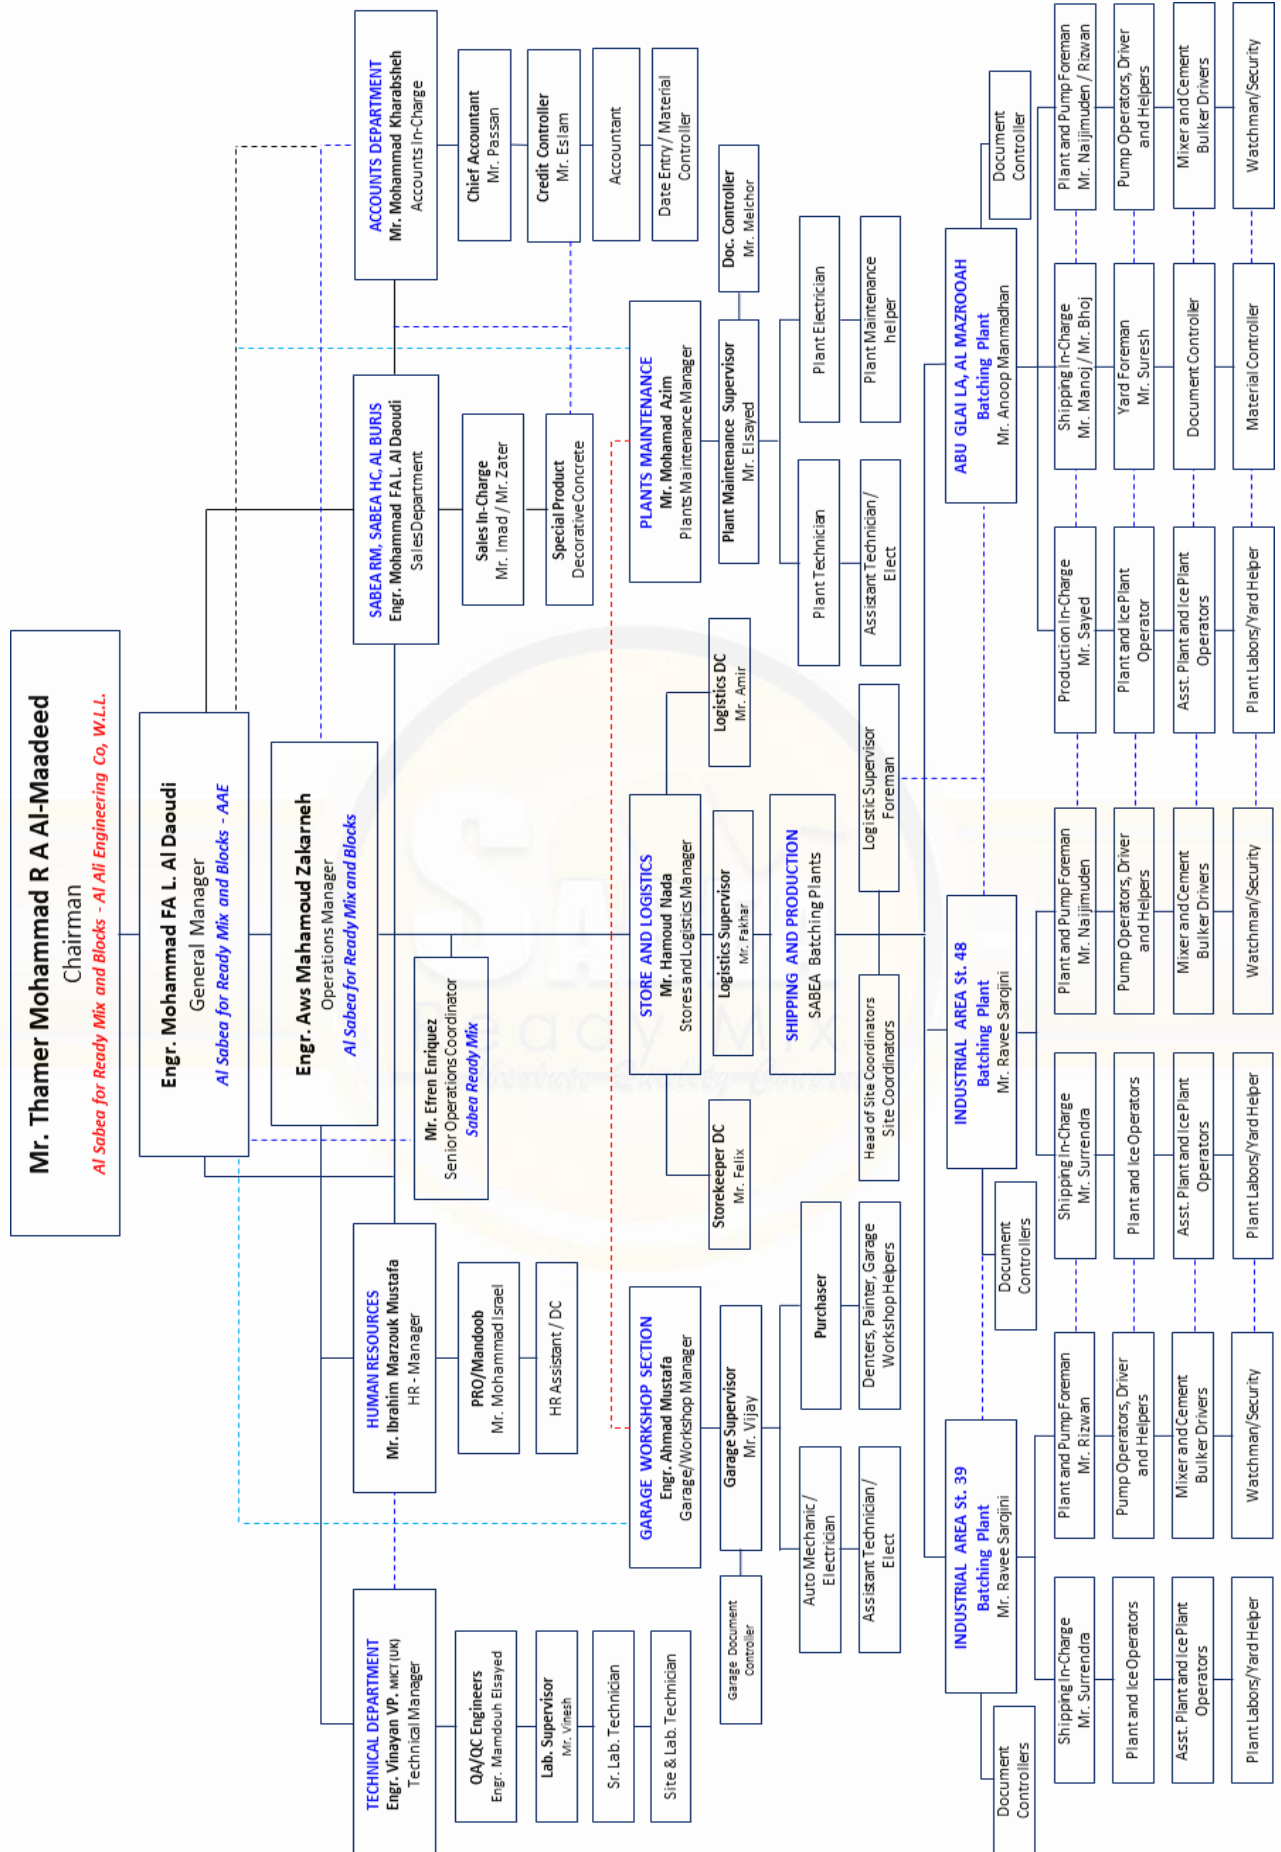

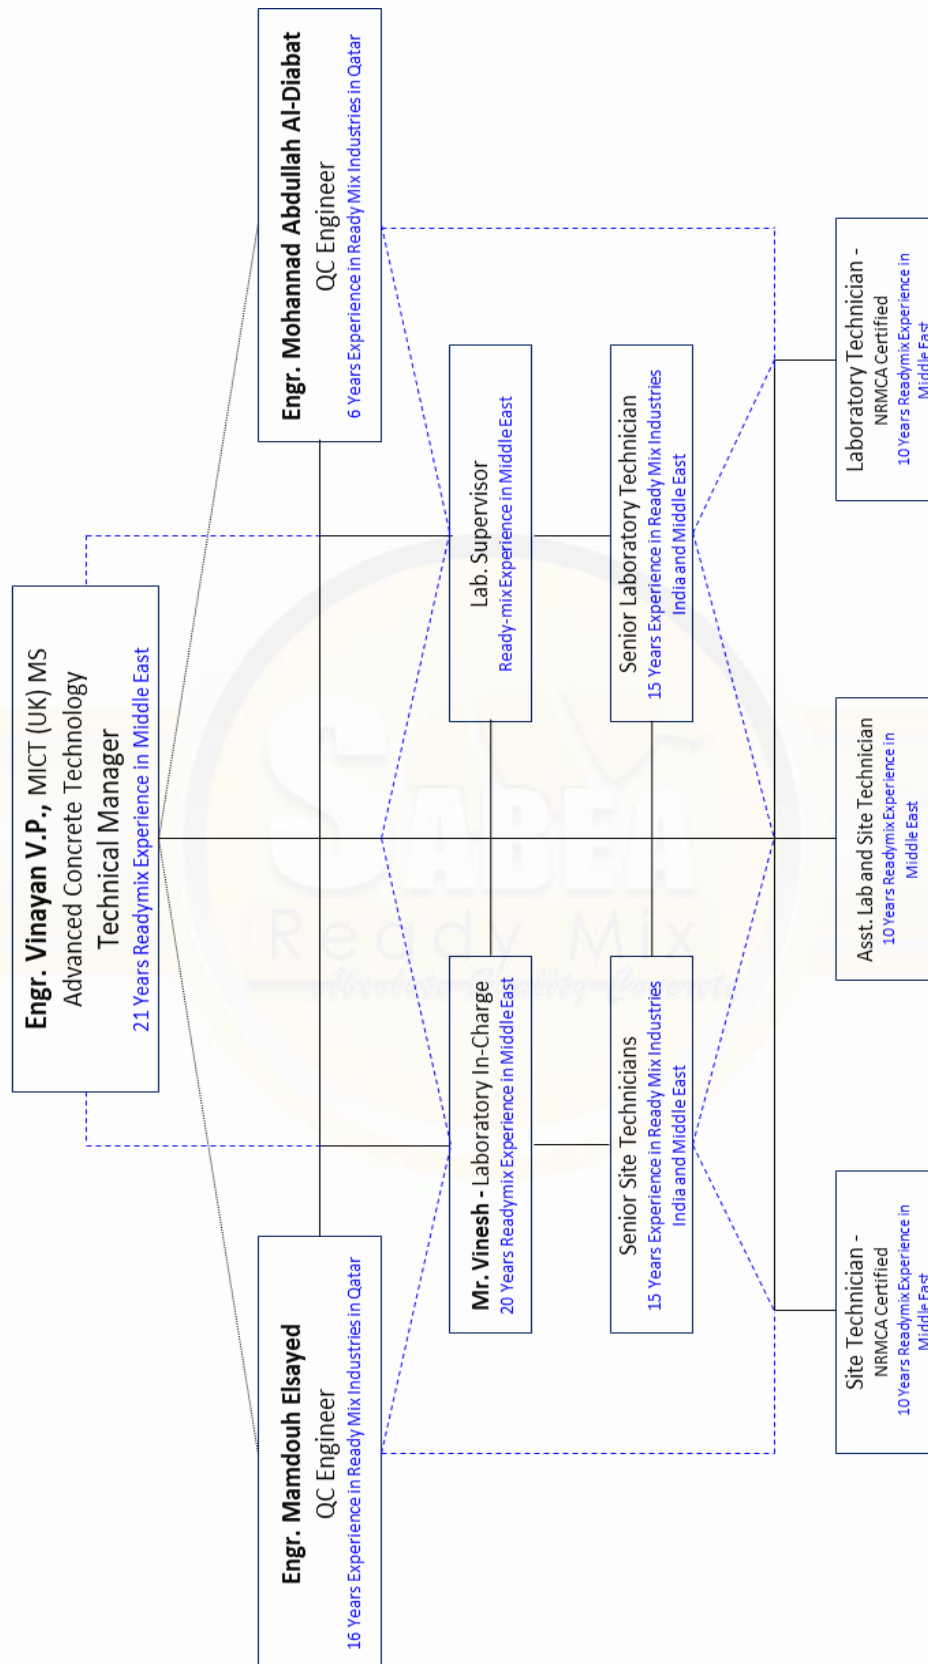



وزارة التجارة والصناعة

Ministry of Commerce and Industry

Registration and Commercial
Licenses Department

مستخرج بعض بيانات السجل التجاري

إدارة التسجيل
والتراخيص التجارية

تاريخ المطبعة: 2021/08/07



رقم السجل التجاري: 145319/1
الاسم التجاري: الصية للردى مكس والطاويق
تاريخ انشاء السجل: 01/09/2020
الشكل القانوني: شركة ذات مسؤولية محدودة
حالة السجل: نشط
عدد الفروع: 0

رقم التسجيل الضريبي: 24/08/2025
الاسم التجارية: رأس المال: قطر
جنسية المنشأة: قطر

معلومات الاتصال:
أرقام الاتصال: صندوق البريد:

المندراء (المحولون بالتوقيع)

| الاسم | رقم الإثبات | رقم السجل | الجنسية | الصفة (الضالفة) |
|------------------------------|-------------|-----------|---------|-----------------------------|
| محمد راشد حدي العلي المعاضيد | 25663400586 | | قطر | صلاحيات كاملة ومطلقة - مدير |
| علي محمد راشد العلي المعاضيد | 28863402553 | | قطر | صلاحيات كاملة ومطلقة - مدير |

الأنشطة التجارية

| الاسم | رقم النشاط | اسم النشاط |
|------------------------------|------------|-----------------------------------------|
| محمد راشد حدي العلي المعاضيد | 4463322 | Trading in the mountain gravel (gabbro) |
| علي محمد راشد العلي المعاضيد | 2300000 | Manufacture of other non-metal products |

Page 1 of 2
رقم السجل: 1/145319/1
QATAR CHAMBER

تشهد غرفة تجارة وصناعة قطر بأن المنشأة المذكورة أعلاه سجلت في
Qatar Chamber certifies that the above mentioned establishment has been registered



وزارة التجارة والصناعة

Ministry of Commerce and Industry
دولة قطر - State of Qatar

Registration and Commercial
Licenses Department

إدارة التسجيل
والتراخيص التجارية

Commercial Registration Data



Issue Date: 22/04/2024

Commercial Reg. No.: 145319/1
Trade Name: Al-sbyh Lirda Wmks
Creation Date: 01/09/2020
Legal Form: W.L.L.
Commercial Reg. Status: Active
No. of Branches: 1

Tax Reg. No.: 5002154797
Trade Type: Watabwq
Expiry Date: 24/08/2025
Capital: Firm Nationality: QATAR

Contact Information

Mail Box: Contacts Numbers:
Email:

Managers (Authorized Signatories)

| Name | Document No | CR No | Nationality | Designation (Authority) |
|-----------------------------|-------------|-------|-------------|---------------------------------------|
| ALI MOHAMMED R A AL-MAADEED | 28863402553 | | QATAR | Manager - Full and Absolute Authority |
| MOHD RASHID H A AL-MAADEED | 25663400586 | | QATAR | Manager - Full and Absolute Authority |

Business Activities

| Activity Name | Activity Code | Activity Name | Activity Code |
|-----------------------------------------|---------------|-----------------------------------------|---------------|
| Trading in the mountain gravel (gabbro) | 4463322 | Manufacture of other non-metal products | 2300000 |

Page 1 of 2
CR No: 145319/1
QATAR CHAMBER

تشهد غرفة تجارة وصناعة قطر بأن المنشأة المذكورة أعلاه سجلت في
Qatar Chamber certifies that the above mentioned establishment has been registered



وزارة التجارة والصناعة

Ministry of Commerce and Industry

Registration and Commercial
Licenses Department

مستخرج بعض بيانات السجل التجاري

إدارة التسجيل
والتراخيص التجارية

| | | | |
|--------------------------------|---------|-------------------------------------------------------------|---------|
| التجارة في الحصى الجبلي الجابو | 4463322 | صناعة منتجات المعادن اللافلزية الأخرى (منتجات غير معدنية) | 2300000 |
|--------------------------------|---------|-------------------------------------------------------------|---------|

Page 2 of 2
رقم السجل: 1/145319/1
QATAR CHAMBER

تشهد غرفة تجارة وصناعة قطر بأن المنشأة المذكورة أعلاه سجلت في
Qatar Chamber certifies that the above mentioned establishment has been registered



وزارة التجارة والصناعة

Ministry of Commerce and Industry
دولة قطر - State of Qatar

Registration and Commercial
Licenses Department

إدارة التسجيل
والتراخيص التجارية

Commercial Registration Data

Branches

| Sequence No | Branch Name | Branch CR | Branch Status |
|-------------|----------------------------|-----------|---------------|
| 1 | Al-sbyh Lirda Wmks Watabwq | 145319/1 | Active |

Page 2 of 2
CR No: 145319/1
QATAR CHAMBER

تشهد غرفة تجارة وصناعة قطر بأن المنشأة المذكورة أعلاه سجلت في
Qatar Chamber certifies that the above mentioned establishment has been registered



وزارة التجارة والصناعة
Ministry of Commerce and Industry

Registration and Commercial
Licenses Department

مستخرج بعض بيانات السجل التجاري

إدارة التسجيل
والتراخيص التجارية

تاريخ الطباعة: 2021/08/07



رقم السجل التجاري: 145319/1
الاسم التجاري: الصيه لاردي مكس والطابوق
تاريخ انشاء السجل: 01/09/2020
الشكل القانوني: شركة ذات مسئولية محدودة
حالة السجل: نشط
عدد الفروع: 0

رقم التسجيل الضريبي: 24/08/2025
الصفة التجارية: رأس المال:
جنسية المنشأة: قطر

معلومات الاتصال:
أرقام الاتصال:

صندوق البريد:

المدرء (المخولون بالتوقيع)

| الاسم | رقم الإثبات | رقم السجل | الجنسية | الصفة (الصلاحية) |
|------------------------------|-------------|-----------|---------|-----------------------------|
| محمد راشد حدي العلي المعاضيد | 25663400586 | | قطر | صلاحيات كاملة ومطلقة - مدير |
| علي محمد راشد العلي المعاضيد | 28863402553 | | قطر | صلاحيات كاملة ومطلقة - مدير |

الأنشطة التجارية

| الرقم | اسم النشاط | الرقم | اسم النشاط |
|-------|------------|-------|------------|
|-------|------------|-------|------------|



Page 1 of 2
رقم السجل: 1/145319

QATAR CHAMBER

تشهد غرفة تجارة وصناعة قطر بأن المنشأة المذكورة أعلاه سجلت لديها
Qatar Chamber certifies that the above mentioned establishment has been registered

دولة قطر
وزارة الداخلية
إدارة الهجرة والجنسية

Establishment Card
بطاقة قيد المنشأة

Est. ID: 17-1992-58
رقم قيد المنشأة

Est. Name: AL SABA FOR READY MIX AND BLOCKS
اسم المنشأة: الصيه لاردي مكس والطابوق

Sector: INDUSTRIAL
القطاع: صناعي

First Issue: 2021-08-01
تاريخ أول إصدار

Expiry Date: 2025-07-20
تاريخ الصلاحية

موقع عمل الوزارة العامة للهجرات

Signature: [Signature]

المفوضين

| الاسم | رقم الوثيقة |
|------------------------------|-------------|
| علي محمد راشد العلي المعاضيد | 28863402553 |
| علي محمد راشد العلي المعاضيد | 29463404476 |
| محمد راشد حدي العلي المعاضيد | 25663400586 |
| علي محمد راشد العلي المعاضيد | 29563405259 |

Card: 1 / 1 Instruction
من من بعد هذه البطاقة ان يقوم بتسليمها الى مركز الهجرة



وزارة التجارة والصناعة
Ministry of Commerce and Industry

Registration and Commercial
Licenses Department

مستخرج بعض بيانات السجل التجاري

إدارة التسجيل
والتراخيص التجارية

| | | | |
|-------------------------------|---------|---------------------------------------------------|---------|
| التجارة في الحصى الجلي الخادو | 6663322 | صناعة منتجات المعادن الأخرى (منتجات غير معدنية) | 2300000 |
|-------------------------------|---------|---------------------------------------------------|---------|



Page 2 of 2
رقم السجل: 1/145319

QATAR CHAMBER

تشهد غرفة تجارة وصناعة قطر بأن المنشأة المذكورة أعلاه سجلت لديها
Qatar Chamber certifies that the above mentioned establishment has been registered

وزارة التجارة والصناعة
Ministry of Commerce and Industry
دولة قطر - State of Qatar

ترخيص تشغيل صناعي (شهادة قيد)

Industrial Development Department

تاريخ الطابعة: 30/4/2024

بيانات التسجيل التجاري

الاسم التجاري: الصبب للردى مكس والطابق

النمط القانوني: 145319/1

رقم السجل التجاري: 07/03/2024

تاريخ بدء النشاط:

بيانات ترخيص التشغيل

رقم ترخيص التشغيل: 1708

تاريخ إصدار الترخيص: 07/03/2024

تاريخ انتهاء الترخيص: 06/03/2026

بيانات موقع المصنع

رقم و اسم المنطقة: المنطقة الصناعية - 57

رقم الشارع:

رقم المبنى:

الرقم المساحي:

معلومات التواصل

رقم الهاتف: 55567546

رقم الموبايل: 9106

صندوق البريد: MMAHDY@AAE.COM.QA

البريد الإلكتروني:

الأنشطة الصناعية

| Activity | وصف النشاط | رقم النشاط Isic Code | م |
|-------------------------------|--------------------------|-------------------------|---|
| Ready Mix Concrete Production | إنتاج خرسانة جاهزة الخلط | 239530 | 1 |

المنتجات

| الرمز المسجل HS Code | المنتج Product | الوحدة Unit | القدرة التصميمية Design Capacity | القدرة الإنتاجية Production Capacity |
|-------------------------|-----------------------------------------------------|----------------|-------------------------------------|-----------------------------------------|
| 68101990 | خرق 18 من مصنوعات من إسمنت أو خرسانة أو حجر اصطناعي | 20 | 240,000 | 240,000 |

Page 1 of 1

رقم ترخيص التشغيل الصناعي: 1708

وزارة الداخلية
الإدارة العامة للدفاع المدني
أدارة الوقاية

وزارة الداخلية
Ministry of Interior
دولة قطر - State of Qatar

شهادة

تاريخ الطابعة: 2023-06-19 AM 9:50

وقت الطابعة: 2023-06-19 AM 9:50

رقم الطلب: CAC23000808

نوع الشهادة

صلاحية نظام الوقاية ومكافحة الحريق (جاري)

بيانات المنشأة

الاسم التجاري: الصبب للردى مكس والطابق

رقم السجل التجاري: 145319/1

رقم قيد المنشأة: 17-1992-58

بيانات صاحب الشهادة

الاسم: محمد راشد جعي العلي المعاضيد

الرقم الشخصي: 25663400586

الجنس: 55567546

تفاصيل العنوان

رقم المنطقة: 57

اسم الشارع: شارع 48

رقم قطعة الأرض: 123

تفاصيل الشهادة

1. يجب تنفيذ جميع أحكام قانون الدفاع المدني رقم (25) لسنة 2015 والالتزام التام به.

2. يجب الحصول على موافقات الجهات المختصة للنشاط المراد ممارسته.

تاريخ إصدار الشهادة: 2023-06-19

تاريخ انتهاء الشهادة: 2025-06-18

مدير إدارة الوقاية

الإدارة العامة للدفاع المدني

ضريبة
Dhareeba
tax portal

14/08/2021

TAX CARD - بطاقة ضريبة

The General Tax Authority of Qatar certifies that the entity is registered as per the following details:

تشهد الهيئة العامة للضرائب في دولة قطر أن الجهة أدناه مسجلة حسب البيانات التالية:

TIN Number 5002154797 **رقم التعريف الضريبي**

Taxpayer Name: الصبب للردى مكس والطابق **إسم المكلف:**

Commercial Registration Number 145319 **رقم السجل التجاري القطري**

Address [Headquarter]: Zone: 57, Building: منطقة 57, شارع: 39, قطر - Qatar **العنوان (المركز الرئيسي):**

Main Activity: صناعة منتجات المعادن اللافلزية الأخرى (منتجات غير 2300000-Manufacture of other non-metal products) **النشاط الرئيسي:**

Legal Form: شركة ذات مسؤولية محدودة **الشكل القانوني:**

Activity Commencement Date: 04/08/2020 **تاريخ بدء النشاط:**

Number of Branches: 1 **عدد الفروع:**

Registered taxes: **الضرائب المسجلة:**

Income Tax REGISTERED - 04/08/2020 **الضريبة على الدخل**

الهيئة العامة للضرائب
GENERAL TAX AUTHORITY

هذه الوثيقة مستخرجة من النظام الآلي و ليس من الضروري التوقيع عليها
This is a system generated document and does not require to be signed.

Ministry of Environment and Climate Change
Industrial Inspection & Pollution Control Dept.

وزارة البيئة والتغير المناخي
إدارة التفتيش الصناعي ومكافحة التلوث

OL:13/63 رقم التصريح

EID:12/1985 رقم المصنع

2022/09/06 صادر بتاريخ

2022/233369

تصريح تشغيل

OL:13/63 رقم التصريح

EID:12/1985 رقم المصنع

المشروع/اسم المنشأة: الصبب للردى مكس والطابق

أصاحب التصريح/اسم صاحب: شركة النقي الهندسة والمقاولات والجزء

الموقع: المنطقة الصناعية طريق سوي

نوع ترخيص: تجاري

تاريخ إصدار: 04/09/2022

تاريخ الانتهاء: 03/09/2025

| المنتج | اسم النشاط | رقم النشاط |
|--------------------------------|------------------------------------------------------|------------|
| إنتاج الخرسانة الجاهزة والطابق | صناعة الآلات المتخصصة الأخرى غير المصنعة في مكان آخر | 29299 |

ع/أسعد علي سعيد القفدي
مساعد مدير إدارة التفتيش الصناعي
ومكافحة التلوث بالتكليف

بجاءة أمانة

ماتف: (+974) 44263466 - فاكس: (+974) 44263466
P.O.Box: 22445 Doha - Qatar
www.mccc.gov.qa

ماتف: (+974) 44263466 - فاكس: (+974) 44348888
م.ب: 22445 الدوحة - قطر

QATAR CHAMBER OF COMMERCE & INDUSTRY
 Tel : 4455 9111 | Fax: 4466 1693 - 4466 1697
 P. O. Box : 402 | Doha - Qatar
 E-mail: info@qcci.org | www.qatarchamber.com

غرفة قطر
QATAR CHAMBER

غرفة تجارة وصناعة قطر
 هاتف : ٤٤٥٥ ٩١١١ فاكس : ٤٤٦٦ ١٦٩٧ - ٤٤٦٦ ١٦٩٣
 ص.ب : ٤٠٢ ، الدوحة ، قطر
 بريد إلكتروني: info@qcci.org | www.qatarchamber.com

شهادة عضوية
MEMBERSHIP CERTIFICATE

عام : 2021

تشهد غرفة تجارة وصناعة قطر

بأن السادة الصبيه للردى مكس والطابوق

عضو منتسب لدى الغرفة برقم عضوية 02/03871 ولديهم عدد (1) فرعاً

التاريخ: 2021/09/12

الرجاء النظر خلف الشهادة

ملاحظة : هذه الشهادة سارية المفعول حتى 2025/08/24

أى كشط أو تعديل بهذه الشهادة تعتبر لا غية

الإدارة

QATAR CHAMBER OF COMMERCE & INDUSTRY
 Tel : 4455 9111 | Fax: 4466 1693 - 4466 1697
 P. O. Box : 402 | Doha - Qatar
 E-mail: info@qcci.org | www.qatarchamber.com

غرفة قطر
QATAR CHAMBER

غرفة تجارة وصناعة قطر
 هاتف : ٤٤٥٥ ٩١١١ فاكس : ٤٤٦٦ ١٦٩٧ - ٤٤٦٦ ١٦٩٣
 ص.ب : ٤٠٢ ، الدوحة ، قطر
 بريد إلكتروني: info@qcci.org | www.qatarchamber.com

شهادة عضوية
MEMBERSHIP CERTIFICATE

Year : 2021

Qatar Chamber Of Commerce & Industry certify that

SABEA REDEMIX TABOOK

is a member of QCCI under Membership No 02/03871 and has (1) branches

Date: 12/09/2021

Management

Note : This certificate is valid until: 24/08/2025

* Any alterations , overwriting or amendments to this certificate shall annul it.

* Please see important notices on the back side

الهيئة العامة للمواصفات والمقاييس
Qatar General Organization for Standardization

CONFORMITY CERTIFICATE

وفقاً للأمر الصادر بقرار وزير البلدية والبيئة رقم (١٦٨) لسنة ٢٠١٧ م
According to the Ministerial Decree No. (168)/2017

| | | | | | |
|-----------------------|----------------------------------------------------------------------------|--|--|--|--|
| PLANT TYPE AND NAME | PLANT NO. 01 Wet Mix, IMFR-ORU LOGIK 2 WXL -1004000 | | | | |
| CERTIFICATE NO. | RM 1014 | | | | |
| DATE OF ISSUE: | May. 13, 2024. | | | | |
| DATE OF VALIDITY: | May. 12, 2025* | | | | |
| COMPANY NAME: | SABEA READY MIX CO. P.O. Box 9106 Doha-Qatar Tel: 4492452 Fax: 44438576 | | | | |
| PLANT LOCATION: | MAZROUAH, UMM SALAL. | | | | |
| APPLICATION NO. | 224-2024 | | | | |
| SAMPLE ID NO. | QCD-QM-RM/24-CS-05 | | | | |
| EVALUATION REPORT NO. | QCD-QM-RM/24-FR-17 | | | | |

| Aggregates Type. | OPC NORMAL Mixes | SRC NORMAL Mixes | CEMENTITIOUS MATERIALS Mixes | Admixtures | @Standards Of Control | |
|-------------------------------------------------|------------------|------------------|------------------------------|----------------------------------|-----------------------|--------|
| Gabbro • (20 mm) • (10 mm) - Wash Sand | -C30/20 | -C40/20 | ----- | Chryso -CQ20 DCP -PC380 | At Plant | At Lab |

Scope of Audit: Qatar General Organization for Standardization (Quality and Conformity Department) hereby attests that test results for samples of materials and mixes as described above conform to the requirements of the standard specifications as per QCS 2014. This attestation had based on the results of tests conducted on random samples selected from the above materials and mixes using sampling procedures given in the specific rules and standards of QCS 2014. It is applicable only to the materials and mixes as described in this certificate and does not cover the entire production of the factory or others branch of the company.

Responsibility: Materials and mixes mentioned above or not, shall be checked for quality of products at any time according to QCS 2014 with the requirements of the projects and approved by Engineer or Consultant. All mixes were marking with (**) mean Cementitious contents more than 400 kg/m³ and shall not be used unless special consideration has been given to the effect for heat of hydration and reduce thermal stress in the concrete.

Recommendations: It is recommended to use materials not listed in this certificate without approval from Quality and Conformity Department.

Restrictions: It has not permitted to use materials not listed in this certificate without approval from Quality and Conformity Department.

Conditions: The above mentioned plant/supplier had founded to be satisfactory at the time of inspection and quality audit (in accordance with Qatar standard regulations and requirements of the QCS 2014) this certificate will remain valid until the period have shown above, Quality and compliance audits will carry out by Qatar General Organization for Standardization (Quality and Conformity Department) in order to prove that the quality procedure is satisfactory.

Notes:

- OS has no any responsibility for supplying of modified or poor quality by the manufacture / supplier during the validity period.
- It is important to apply two months before expiry date of validity for renewal of this conformity certificate.
- The required fee for this certificate has been stated according to the decision No. (112/2019).

Recommended by: Head of QC Section
Authorized by: Director of Quality and Conformity Department
Approved by: PRESIDENT, QGOS



الهيئة العامة للمواصفات والمقاييس
Qatar General Organization for Standardization

CONFORMITY CERTIFICATE

وفقاً للأمر الصادر بقرار وزير البلدية والبيئة رقم (١٦٨) لسنة ٢٠١٧ م
According to the Ministerial Decree No. (168)/2017

| | | | | | |
|-----------------------|----------------------------------------------------------------------------|--|--|--|--|
| PLANT TYPE AND NAME | PLANT NO. 05 Wet Mix, LUBBILERR-GA 929105. | | | | |
| CERTIFICATE NO. | RM 1016 | | | | |
| DATE OF ISSUE: | May. 13, 2024. | | | | |
| DATE OF VALIDITY: | May. 12, 2025* | | | | |
| COMPANY NAME: | SABEA READY MIX CO. P.O. Box 9106 Doha-Qatar Tel: 4492452 Fax: 44438576 | | | | |
| PLANT LOCATION: | MAZROUAH, UMM SALAL. | | | | |
| APPLICATION NO. | 226-2024 | | | | |
| SAMPLE ID NO. | QCD-QM-RM/24-CS-05 | | | | |
| EVALUATION REPORT NO. | QCD-QM-RM/24-FR-17 | | | | |

| Aggregates Type. | OPC NORMAL Mixes | SRC NORMAL Mixes | CEMENTITIOUS MATERIALS Mixes | Admixtures | @Standards Of Control | |
|-------------------------------------------------|------------------|------------------|------------------------------|----------------------------------|-----------------------|--------|
| Gabbro • (20 mm) • (10 mm) - Wash Sand | -C30/20 | -C40/20 | ----- | Chryso -CQ20 DCP -PC380 | At Plant | At Lab |

Scope of Audit: Qatar General Organization for Standardization (Quality and Conformity Department) hereby attests that test results for samples of materials and mixes as described above conform to the requirements of the standard specifications as per QCS 2014. This attestation had based on the results of tests conducted on random samples selected from the above materials and mixes using sampling procedures given in the specific rules and standards of QCS 2014. It is applicable only to the materials and mixes as described in this certificate and does not cover the entire production of the factory or others branch of the company.

Responsibility: Materials and mixes mentioned above or not, shall be checked for quality of products at any time according to QCS 2014 with the requirements of the projects and approved by Engineer or Consultant. All mixes were marking with (**) mean Cementitious contents more than 400 kg/m³ and shall not be used unless special consideration has been given to the effect for heat of hydration and reduce thermal stress in the concrete.

Recommendations: It is recommended to use materials not listed in this certificate without approval from Quality and Conformity Department.

Restrictions: It has not permitted to use materials not listed in this certificate without approval from Quality and Conformity Department.

Conditions: The above mentioned plant/supplier had founded to be satisfactory at the time of inspection and quality audit (in accordance with Qatar standard regulations and requirements of the QCS 2014) this certificate will remain valid until the period have shown above, Quality and compliance audits will carry out by Qatar General Organization for Standardization (Quality and Conformity Department) in order to prove that the quality procedure is satisfactory.

Notes:

- OS has no any responsibility for supplying of modified or poor quality by the manufacture / supplier during the validity period.
- It is important to apply two months before expiry date of validity for renewal of this conformity certificate.
- The required fee for this certificate has been stated according to the decision No. (112/2019).

Recommended by: Head of QC Section
Authorized by: Director of Quality and Conformity Department
Approved by: PRESIDENT, QGOS



الهيئة العامة للمواصفات والمقاييس
Qatar General Organization for Standardization

CONFORMITY CERTIFICATE

وفقاً للأمر الصادر بقرار وزير البلدية والبيئة رقم (١٦٨) لسنة ٢٠١٧ م
According to the Ministerial Decree No. (168)/2017

| | | | | | |
|-----------------------|----------------------------------------------------------------------------|--|--|--|--|
| PLANT TYPE AND NAME | PLANT NO. 02 Wet Mix, LIMAR ORU LOGIK WXL 4/8 -8080367. | | | | |
| CERTIFICATE NO. | RM 1015 | | | | |
| DATE OF ISSUE: | May. 13, 2024. | | | | |
| DATE OF VALIDITY: | May. 12, 2025* | | | | |
| COMPANY NAME: | SABEA READY MIX CO. P.O. Box 9106 Doha-Qatar Tel: 4492452 Fax: 44438576 | | | | |
| PLANT LOCATION: | MAZROUAH, UMM SALAL. | | | | |
| APPLICATION NO. | 225-2024 | | | | |
| SAMPLE ID NO. | QCD-QM-RM/24-CS-05 | | | | |
| EVALUATION REPORT NO. | QCD-QM-RM/24-FR-17 | | | | |

| Aggregates Type. | OPC NORMAL Mixes | SRC NORMAL Mixes | CEMENTITIOUS MATERIALS Mixes | Admixtures | @Standards Of Control | |
|-------------------------------------------------|------------------|------------------|------------------------------|----------------------------------|-----------------------|--------|
| Gabbro • (20 mm) • (10 mm) - Wash Sand | -C30/20 | -C40/20 | ----- | Chryso -CQ20 DCP -PC380 | At Plant | At Lab |

Scope of Audit: Qatar General Organization for Standardization (Quality and Conformity Department) hereby attests that test results for samples of materials and mixes as described above conform to the requirements of the standard specifications as per QCS 2014. This attestation had based on the results of tests conducted on random samples selected from the above materials and mixes using sampling procedures given in the specific rules and standards of QCS 2014. It is applicable only to the materials and mixes as described in this certificate and does not cover the entire production of the factory or others branch of the company.

Responsibility: Materials and mixes mentioned above or not, shall be checked for quality of products at any time according to QCS 2014 with the requirements of the projects and approved by Engineer or Consultant. All mixes were marking with (**) mean Cementitious contents more than 400 kg/m³ and shall not be used unless special consideration has been given to the effect for heat of hydration and reduce thermal stress in the concrete.

Recommendations: It is recommended to use materials not listed in this certificate without approval from Quality and Conformity Department.

Restrictions: It has not permitted to use materials not listed in this certificate without approval from Quality and Conformity Department.

Conditions: The above mentioned plant/supplier had founded to be satisfactory at the time of inspection and quality audit (in accordance with Qatar standard regulations and requirements of the QCS 2014) this certificate will remain valid until the period have shown above, Quality and compliance audits will carry out by Qatar General Organization for Standardization (Quality and Conformity Department) in order to prove that the quality procedure is satisfactory.

Notes:

- OS has no any responsibility for supplying of modified or poor quality by the manufacture / supplier during the validity period.
- It is important to apply two months before expiry date of validity for renewal of this conformity certificate.
- The required fee for this certificate has been stated according to the decision No. (112/2019).

Recommended by: Head of QC Section
Authorized by: Director of Quality and Conformity Department
Approved by: PRESIDENT, QGOS



CONFORMITY CERTIFICATE

Qatar General Organization for Standardization

وفقاً لللائحة الصادرة بقرار وزير البلدية والبيئة رقم (١٦٨) لسنة ٢٠١٧ م
According to the Ministerial Decree No. (168)/2017

| | | | | | |
|------------------------------|-------------------------------------------------------------------------------------|--|--|--|--|
| PLANT TYPE AND NAME | PLANT NO. 06 Wet Mix, IMER-Oruday, 13084-15030077. | | | | |
| CERTIFICATE NO. | RM 1037 | | | | |
| DATE OF ISSUE: | Nov. 24, 2024 | | | | |
| DATE OF VALIDITY: | Nov. 23, 2025* | | | | |
| COMPANY NAME | SABEA READY MIX CO.(St:48) P.O. Box 82614 Doha-Qatar Tel: 44922452 Fax: 44438576 | | | | |
| PLANT LOCATION | IND AREA, ST:48. | | | | |
| APPLICATION NO. | 905-2024 | | | | |
| SAMPLE ID NO. | QCD-QM-RM/24-CS-15 | | | | |
| EVALUATION REPORT NO. | QCD-QM-RM/24-FR-29 | | | | |

| Aggregates Type | OPC NORMAL Mixes | SRC NORMAL Mixes | CEMENTITIOUS MATERIALS Mixes | Admixture | @Standards Of Control |
|-------------------------------------------|------------------|------------------|------------------------------|-----------------------------------|-----------------------|
| Gabbro (20 mm) (10 mm) Wash Sand | - C40/20 | - C30/20 | ----- | Chryso -CQ20 -DCP -PC380 | At Plant At Lab |

Scope of Audit: Qatar General Organization for Standardization (Quality and Conformity Department) hereby attests that test results for samples of materials and mixes as described above conform to the requirements of the standard specifications as per QCS 2014.
This attestation had based on the results of tests conducted on random samples selected from the above materials and mixes using sampling procedures given in the specific rules and evaluated as per QCS 2014. It is applicable only to the materials and mixes as described in this certificate and does not cover the entire production of the factory or others branch of the company.
Responsibility: Materials and mixes mentioned above or not, shall be checked for quality of products at any time according to QCS 2014 with the requirements of the projects and approved by Engineer or Consultant. All mixes were making with (*) mean Cementitious contents more than 400 kg/m³ and shall not be used unless special consideration has been given to the effect for heat of hydration and reduce thermal stress in the concrete.
Recommendations: In accordance with the principals of (ACI-214) relating to ready-mix concrete factories to the purpose of differentiate between producers and dividing them into classes, or categories as per performance and control of quality.
Restrictions: It has not permitted to use materials not listed in this certificate without approval from Quality and Conformity Department.
Conditions: The above ready mixed plant/supplier had founded to be satisfactory at the time of inspection and quality audit. In accordance with Qatar standard regimes and requirements of the QCS 2014 this certificate will remain valid until the period have shown above. Quality and compliance audits will carry out by Qatar General Organization for Standardization (Quality and Conformity Department) in order to prove that the quality procedure is satisfactory.

Notes:

1. QS has no any responsibility for supplying of modified or poor quality by the manufacture / supplier during the validity period.
2. It is important to apply two months before expiry date of validity for renewal of this conformity certificate.
3. The required fee for this certificate has been stated according to the decision No. (119)/2010.

Recommended by: Head of QC Section
Approved by: PRESIDENT, QGOS
Authorized by: Director of Quality and Conformity Department

CONFORMITY CERTIFICATE

Qatar General Organization for Standardization

وفقاً لللائحة الصادرة بقرار وزير البلدية والبيئة رقم (١٦٨) لسنة ٢٠١٧ م
According to the Ministerial Decree No. (168)/2017

| | | | | | |
|------------------------------|-------------------------------------------------------------------------------------|--|--|--|--|
| PLANT TYPE AND NAME | PLANT NO. 07 Wet Mix, STETTER-MC 150, HN 3.0 5-62-0122-00. | | | | |
| CERTIFICATE NO. | RM 1038 | | | | |
| DATE OF ISSUE: | Nov. 24, 2024 | | | | |
| DATE OF VALIDITY: | Nov. 23, 2025* | | | | |
| COMPANY NAME | SABEA READY MIX CO.(St:48) P.O. Box 82614 Doha-Qatar Tel: 44922452 Fax: 44438576 | | | | |
| PLANT LOCATION | IND AREA, ST:48. | | | | |
| APPLICATION NO. | 906-2024 | | | | |
| SAMPLE ID NO. | QCD-QM-RM/24-CS-15 | | | | |
| EVALUATION REPORT NO. | QCD-QM-RM/24-FR-29 | | | | |

| Aggregates Type | OPC NORMAL Mixes | SRC NORMAL Mixes | CEMENTITIOUS MATERIALS Mixes | Admixture | Standards Of Control |
|-------------------------------------------|------------------|------------------|------------------------------|-----------------------------------|----------------------|
| Gabbro (20 mm) (10 mm) Wash Sand | - C40/20 | - C30/20 | ----- | Chryso -CQ20 -DCP -PC380 | At Plant At Lab |

Scope of Audit: Qatar General Organization for Standardization (Quality and Conformity Department) hereby attests that test results for samples of materials and mixes as described above conform to the requirements of the standard specifications as per QCS 2014.
This attestation had based on the results of tests conducted on random samples selected from the above materials and mixes using sampling procedures given in the specific rules and evaluated as per QCS 2014. It is applicable only to the materials and mixes as described in this certificate and does not cover the entire production of the factory or others branch of the company.
Responsibility: Materials and mixes mentioned above or not, shall be checked for quality of products at any time according to QCS 2014 with the requirements of the projects and approved by Engineer or Consultant. All mixes were making with (*) mean Cementitious contents in excess of 400 kg/m³ and shall not be used unless special consideration has been given to the effect for heat of hydration and reduce thermal stress in the concrete.
Recommendations: In accordance with the principals of (ACI-214) relating to ready-mix concrete factories to the purpose of differentiate between producers and dividing them into classes, or categories as per performance and control of quality.
Restrictions: It has not permitted to use materials not listed in this certificate without approval from Quality and Conformity Department.
Conditions: The above ready mixed plant/supplier had founded to be satisfactory at the time of inspection and quality audit. In accordance with Qatar standard regimes and requirements of the QCS 2014 this certificate will remain valid until the period have shown above. Quality and compliance audits will carry out by Qatar General Organization for Standardization (Quality and Conformity Department) in order to prove that the quality procedure is satisfactory.

Notes:

1. QS has no any responsibility for supplying of modified or poor quality by the manufacture / supplier during the validity period.
2. It is important to apply two months before expiry date of validity for renewal of this conformity certificate.
3. The required fee for this certificate has been stated according to the decision No. (119)/2010.

Recommended by: Head of QC Section
Approved by: PRESIDENT, QGOS
Authorized by: Director of Quality and Conformity Department



Qatar General Organization for Standardization
Qatar General Organization for Standardization

CONFORMITY CERTIFICATE

وفقاً للائحة المصانة بقرار وزير البلدية والبيئة رقم (١٦٨) لسنة ٢٠١٧م
According to the Ministerial Decree No. (168)/ 2017

| | | | | | |
|-----------------------|-----------------------------------------------------------------------------|--|--|--|--|
| PLANT TYPE AND NAME | PLANT NO. 03 Wet Mix, ORU - LOGIK 2WXL-10040100. | | | | |
| CERTIFICATE NO. | RM 1042 | | | | |
| DATE OF ISSUE: | JAN. 28, 2025. | | | | |
| DATE OF VALIDITY: | Jan. 27, 2026* | | | | |
| COMPANY NAME: | SABEA READY MIX CO. P.O. Box 9106 Doha-Qatar Tel: 44922452 Fax: 44438576 | | | | |
| PLANT LOCATION. | INDUSTRIAL AREA - ST NO: 39. | | | | |
| APPLICATION NO. | 1084-2025. | | | | |
| SAMPLE ID NO. | QCD-QM-RM/24-CS-17. | | | | |
| EVALUATION REPORT NO. | QCD-QM-RM/25-FR-02. | | | | |

| Aggregates Type. | OPC NORMAL Mixes | SRC NORMAL Mixes | CEMENTITIOUS MATERIALS Mixes | Admixtures | @Standards Of Control |
|-------------------------------------------------|------------------|------------------|------------------------------|--------------------------------------|----------------------------|
| Gabbro • (20 mm) • (10 mm) - Wash Sand | -C40/20 | -C30/20 | ----- | • Chryso -CQ20 • DCP -PC380 | At Plant At Lab ---- |

Scope of Audit: Qatar General Organization for Standardization (Quality and Conformity Department) hereby attests that test results for samples of materials and mixes as described above conform to the requirements of the standard specifications as per QCS 2014.

Responsibility: Materials and mixes mentioned above or not; shall be checked for quality of products at any time according to QCS 2014 with the requirements of the projects and approved by Engineer or Consultant. All mixes were marking with (**) mean Cementitious contents in excess of 400 kg/m³ and shall not be used unless special consideration has been given to the effect for heat of hydration and reduce thermal stress in the concrete.

Recommendations: In accordance with the principals of (ACI-214) relating to ready-mix concrete factories to the purpose of differentiate between producers and dividing them into classes, or categories as per performance and control of quality.

Restrictions: It has not permitted to use materials not listed in this certificate without approval from Quality and Conformity Department.

Conditions: The above ready mixed plant/supplier had founded to be satisfactory at the time of inspection and quality audit. (In accordance with Qatar standard regimes and requirements of the QCS 2014) this certificate will remain valid until the period have shown above. Quality and compliance audits will carry out by Qatar General Organization for Standardization (Quality and Conformity Department) in order to prove that the quality procedure is satisfactory.

Notes:

- QCS has no any responsibility for supplying of modified or poor quality by the manufacture / supplier during the Validity period.
- It is important to apply two months before expiry date of validity for renewal of this conformity certificate.
- The required fee for this certificate has been stated according to the decision No. (117) 2014.

Recommended by: Head of QC Section

Approved by: PRESIDENT, QGOS

Qatar General Organization for Standardization
Qatar General Organization for Standardization

CONFORMITY CERTIFICATE

وفقاً للائحة المصانة بقرار وزير البلدية والبيئة رقم (١٦٨) لسنة ٢٠١٧م
According to the Ministerial Decree No. (168)/ 2017

| | | | | | |
|-----------------------|-----------------------------------------------------------------------------|--|--|--|--|
| PLANT TYPE AND NAME | PLANT NO. 04 Wet Mix, IMER-ORUDAY LOGIK-11110269. | | | | |
| CERTIFICATE NO. | RM 1043 | | | | |
| DATE OF ISSUE: | JAN. 28, 2025. | | | | |
| DATE OF VALIDITY: | Jan. 27, 2026* | | | | |
| COMPANY NAME: | SABEA READY MIX CO. P.O. Box 9106 Doha-Qatar Tel: 44922452 Fax: 44438576 | | | | |
| PLANT LOCATION. | INDUSTRIAL AREA - ST NO: 39. | | | | |
| APPLICATION NO. | 1085-2025. | | | | |
| SAMPLE ID NO. | QCD-QM-RM/24-CS-17. | | | | |
| EVALUATION REPORT NO. | QCD-QM-RM/25-FR-02. | | | | |

| Aggregates Type. | OPC NORMAL Mixes | SRC NORMAL Mixes | CEMENTITIOUS MATERIALS Mixes | Admixtures | @Standards Of Control |
|-------------------------------------------------|------------------|------------------|------------------------------|--------------------------------------|----------------------------|
| Gabbro • (20 mm) • (10 mm) - Wash Sand | -C40/20 | -C30/20 | ----- | • Chryso -CQ20 • DCP -PC380 | At Plant At Lab ---- |

Scope of Audit: Qatar General Organization for Standardization (Quality and Conformity Department) hereby attests that test results for samples of materials and mixes as described above conform to the requirements of the standard specifications as per QCS 2014.

Responsibility: Materials and mixes mentioned above or not; shall be checked for quality of products at any time according to QCS 2014 with the requirements of the projects and approved by Engineer or Consultant. All mixes were marking with (**) mean Cementitious contents more than 400 kg/m³ and shall not be used unless special consideration has been given to the effect for heat of hydration and reduce thermal stress in the concrete.

Recommendations: In accordance with the principals of (ACI-214) relating to ready-mix concrete factories to the purpose of differentiate between producers and dividing them into classes, or categories as per performance and control of quality.

Restrictions: It has not permitted to use materials not listed in this certificate without approval from Quality and Conformity Department.

Conditions: The above ready mixed plant/supplier had founded to be satisfactory at the time of inspection and quality audit. (In accordance with Qatar standard regimes and requirements of the QCS 2014) this certificate will remain valid until the period have shown above. Quality and compliance audits will carry out by Qatar General Organization for Standardization (Quality and Conformity Department) to prove that the quality procedure is satisfactory.

Notes:

- QCS has no any responsibility for supplying of modified or poor quality by the manufacture / supplier during the Validity period.
- It is important to apply two months before expiry date of validity for renewal of this conformity certificate.
- The required fee for this certificate has been stated according to the decision No. (117) 2014.

Recommended by: Head of QC Section

Approved by: PRESIDENT, QGOS

National Ready Mixed Concrete Association



Certificate of Conformance For Concrete Production Facilities

THIS IS TO CERTIFY THAT

Bu Glaila Plant 01, Doha, Qatar

Sabea Ready Mix

has been inspected by the undersigned licensed professional engineer for conformance with the requirements of the *Check List for Ready Mixed Concrete Production Facilities*. As of the inspection date, the facilities met the requirements for production by

**Central Mixing with Automatic Batching and Recordings of
Cementitious Materials, Aggregate, Water, and Chemical Admixtures**

Signature of Licensed Professional Engineer

December 05, 2023

December 05, 2025

Inspection Date

Certification Expiration Date

This company will maintain these facilities in compliance with the *Check List* requirements and will correct promptly any deficiencies which develop.

Signature of Company Official

Title of Company Official

NOTICE: The Check List indicates only that plant facilities are satisfactory for the production of concrete when properly operated. Conformance of the concrete itself with specification requirements must be verified by usual inspection methods in accordance with usual agreements.

This certificate is issued by the National Ready Mixed Concrete Association on verification that the production facility conforms to the requirements of the NRMCA Certificate of Ready Mixed Concrete Production Facilities, QCS. Unauthorized reproduction or misuse of this certificate may result in legal action.

Plant ID #: 856570

Certification ID #: 31925

© 1965, 1992, 2001, 2002, 2006, 2007, 2012

National Ready Mixed Concrete Association 66 Canal Center Plaza, Suite 250 • Alexandria • Virginia 22314



National Ready Mixed Concrete Association



Certificate of Conformance For Concrete Production Facilities

THIS IS TO CERTIFY THAT

Bu Glaila Plant 5, Dukhan, Qatar

Sabea Ready Mix

has been inspected by the undersigned licensed professional engineer for conformance with the requirements of the *Check List for Ready Mixed Concrete Production Facilities*. As of the inspection date, the facilities met the requirements for production by

**Central Mixing with Automatic Batching and Recordings of
Cementitious Materials, Aggregate, Water, and Chemical Admixtures**

Signature of Licensed Professional Engineer

December 05, 2023

December 05, 2025

Inspection Date

Certification Expiration Date

This company will maintain these facilities in compliance with the *Check List* requirements and will correct promptly any deficiencies which develop.

Signature of Company Official

Title of Company Official

NOTICE: The Check List indicates only that plant facilities are satisfactory for the production of concrete when properly operated. Conformance of the concrete itself with specification requirements must be verified by usual inspection methods in accordance with usual agreements.

This certificate is issued by the National Ready Mixed Concrete Association on verification that the production facility conforms to the requirements of the NRMCA Certificate of Ready Mixed Concrete Production Facilities, QCS. Unauthorized reproduction or misuse of this certificate may result in legal action.

Plant ID #: 848385

Certification ID #: 31927

© 1965, 1992, 2001, 2002, 2006, 2007, 2012

National Ready Mixed Concrete Association 66 Canal Center Plaza, Suite 250 • Alexandria • Virginia 22314



National Ready Mixed Concrete Association



Certificate of Conformance For Concrete Production Facilities

THIS IS TO CERTIFY THAT

Bu Glaila Plant 02, Doha, Qatar

Sabea Ready Mix

has been inspected by the undersigned licensed professional engineer for conformance with the requirements of the *Check List for Ready Mixed Concrete Production Facilities*. As of the inspection date, the facilities met the requirements for production by

**Central Mixing with Automatic Batching and Recordings of
Cementitious Materials, Aggregate, Water, and Chemical Admixtures**

Signature of Licensed Professional Engineer

December 05, 2023

December 05, 2025

Inspection Date

Certification Expiration Date

This company will maintain these facilities in compliance with the *Check List* requirements and will correct promptly any deficiencies which develop.

Signature of Company Official

Title of Company Official

NOTICE: The Check List indicates only that plant facilities are satisfactory for the production of concrete when properly operated. Conformance of the concrete itself with specification requirements must be verified by usual inspection methods in accordance with usual agreements.

This certificate is issued by the National Ready Mixed Concrete Association on verification that the production facility conforms to the requirements of the NRMCA Certificate of Ready Mixed Concrete Production Facilities, QCS. Unauthorized reproduction or misuse of this certificate may result in legal action.

Plant ID #: 856571

Certification ID #: 31926

© 1965, 1992, 2001, 2002, 2006, 2007, 2012

National Ready Mixed Concrete Association 66 Canal Center Plaza, Suite 250 • Alexandria • Virginia 22314





National Ready Mixed Concrete Association



Certificate of Conformance For Concrete Production Facilities

THIS IS TO CERTIFY THAT

Industrial Area Plant 06, Doha, Qatar
Sabea Ready Mix

has been inspected by the undersigned licensed professional engineer for conformance with the requirements of the *Check List for Ready Mixed Concrete Production Facilities*. As of the inspection date, the facilities met the requirements for production by

**Central Mixing with Automatic Batching and Recordings of
Cementitious Materials, Aggregate, Water, and Chemical Admixtures**


Signature of Licensed Professional Engineer



May 16, 2023

Inspection Date

June 22, 2025

Certification Expiration Date

This company will maintain these facilities in compliance with the *Check List* requirements and will correct promptly any deficiencies which develop.

Signature of Company Official

General Manager

Title of Company Official

NOTICE: The Check List indicates only that plant facilities are satisfactory for the production of concrete when properly operated. Conformance of the concrete itself with specification requirements must be verified by usual inspection methods in accordance with sales agreements.

This certificate is issued by the National Ready Mixed Concrete Association on verification that the production facility conforms to the requirements of the NRMCA Certification of Ready Mixed Concrete Production Facilities, QCS. Unauthorized reproduction or misuse of this certificate may result in legal action.

Plant ID #: 856572

© 1965, 1992, 2001, 2002, 2006, 2007, 2012

Certification ID #: 30939

National Ready Mixed Concrete Association 66 Canal Center Plaza, Suite 250 • Alexandria • Virginia 22314

National Ready Mixed Concrete Association




Certificate of Conformance For Concrete Production Facilities

THIS IS TO CERTIFY THAT

Industrial Area Plant 07, Doha, q
Sabea Ready Mix

has been inspected by the undersigned licensed professional engineer for conformance with the requirements of the *Check List for Ready Mixed Concrete Production Facilities*. As of the inspection date, the facilities met the requirements for production by

**Central Mixing with Automatic Batching and Recordings of
Cementitious Materials, Aggregate, Water, and Chemical Admixtures**


Signature of Licensed Professional Engineer



May 16, 2023

Inspection Date

June 22, 2025

Certification Expiration Date

This company will maintain these facilities in compliance with the *Check List* requirements and will correct promptly any deficiencies which develop.

Signature of Company Official

General Manager

Title of Company Official

NOTICE: The Check List indicates only that plant facilities are satisfactory for the production of concrete when properly operated. Conformance of the concrete itself with specification requirements must be verified by usual inspection methods in accordance with sales agreements.

This certificate is issued by the National Ready Mixed Concrete Association on verification that the production facility conforms to the requirements of the NRMCA Certification of Ready Mixed Concrete Production Facilities, QCS. Unauthorized reproduction or misuse of this certificate may result in legal action.

Plant ID #: 856573

© 1965, 1992, 2001, 2002, 2006, 2007, 2012

Certification ID #: 30940

National Ready Mixed Concrete Association 66 Canal Center Plaza, Suite 250 • Alexandria • Virginia 22314

Batching Plants Major Equipment's

| No's | Major Equipment's | Specification | Quantity |
|------|--------------------------------------------------|-------------------------------|------------|
| 1. | Automated Batching Plants IMER | 120 m ³ /Hour Each | 5 |
| 2. | Automated Batching Plants LIEBHERR | 120 m ³ /Hour Each | 1 |
| 3. | Automated Batching Plants STETTER GmbH Memmingen | 120 m ³ /Hour Each | 1 |
| 4. | Ice Plant KTI | 42 Tons Each | 7 |
| 5. | Chilled Water Plant KTI | 200,000 Litters | 3 |
| 6. | Cementitious Material Storage | 4,000 Tons | Unit Total |
| 7. | Aggregate Storage | 15,000 Tons | Unit Total |
| 8. | Water Tanker | 6,000 Gallons | 10 |
| 9. | Water Tanker | 6,500 Gallons | 6 |
| 10. | Generators | 500 kw | 11 |
| 11. | Air Compressors | - | Unit Total |
| 12. | Weighbridge Stations | kg. | 3 |

Batching Plants Locations and Production Capacity



Main Office

SABEA READY MIX

Batching Plants Industrial Area St. 48 Gate No. 283

| | | |
|---------------------|---|-----------------------------|
| Batching Plants | 1 | STETTER GmbH Memmingen |
| Batching Plants | 1 | IMER Italy |
| Production Capacity | 2 | 240/m ³ Per Hour |
| KTI Ice Plant | 2 | 84 Tons per Day |

Branch 1

SABEA READY MIX

Batching Plants Industrial Area St. 39 Gate No. 64

| | | |
|---------------------|---|-----------------------------|
| Batching Plants | 2 | IMER Italy |
| Production Capacity | 2 | 240/m ³ Per Hour |
| KTI Ice Plant | 2 | 84 Tons per Day |

Branch 2

SABEA READY MIX

Batching Plants Abu Glai La, Al Mazrooah Umm Salal

| | | |
|---------------------|---|-----------------------------|
| Batching Plants | 2 | IMER Italy |
| Batching Plants | 1 | LIEBHERR Germany |
| Production Capacity | 2 | 240/m ³ Per Hour |
| KTI Ice Plants | 2 | 84 Tons per Day |
| KTI Ice Plant | 1 | 42 Tons per Day |

| No's | Vehicles/Fleet | Specifications | Quantity |
|------|----------------------------------------------|---------------------------------|------------------------|
| 1. | Transit Mixer | 9m ³ | 92 |
| 2. | Cement Bulker | 30 Tons | 10 Head / 17 Bulker |
| 3. | Truck Mounted Concrete Mixer Pump | 28m | 1 |
| 4. | Mobile Concrete Pump | 34m | 1 |
| 5. | Mobile Concrete Pump | 42m | 6 |
| 6. | Mobile Concrete Pump | 47m | 1 |
| 7. | Mobile Concrete Pump | 49m | 2 |
| 8. | Mobile Concrete Pump | 56m | 9 |
| 9. | MOLI 2110 HP - Mobile Pipeline Concrete Pump | Delivery pressure up to 220 bar | 2 |
| 10. | Rotary Distributor RV 12 Lift | - | 2 |
| 11. | Rotary Distributor RV 10 | - | 4 |
| 12. | Stationary Concrete Pump | Delivery pressure up to 220 bar | 4 |
| 13. | Spider Placing Boom | HGY 18M | 2 |
| 14. | Stationary Placing Boom | 28M, 30M and 32M | 18 |
| 15. | Loading Shovel | - | 13 |
| 16. | Trailer Truck (Dumper Truck) | 40 Tons | 8 |
| 17. | Sewage Tanker | - | 2 |

| Vehicles/Fleet | Specifications | Pictures |
|-----------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------|
| Transit Mixer | 9m ³ and 8m ³ |  |
| Cement Bulker | 30 Tons |  |
| Truck Mounted Concrete Mixer Pump | 28m |  |
| Mobile Concrete Pump | 34m |  |
| Mobile Concrete Pump | 42m |  |
| Mobile Concrete Pump | 47m |  |
| Mobile Concrete Pump | 49m |  |

| Vehicles/Fleet | Specifications | Pictures |
|----------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------|
| Mobile Concrete Pump | 56m |  |
| MOLI 2110 HP - Mobile Pipeline Concrete Pump | Up to 106m ³ /Hour |  |
| Rotary Distributor RV 12 Lift | 100* / 125 Diameter |  |
| Rotary Distributor RV 10 | 124 Diameter |  |
| Stationary Concrete Pump | 106/70* m ³ /h |  |
| Spider Placing Boom | 18m |  |
| Concrete Placing Boom | 32m |  |

| Vehicles/Fleet | Quantity | Pictures |
|------------------------------------|----------|---------------------------------------------------------------------------------------|
| Compression Testing Machine 3000kn | 3 |  |
| Electric Oven | 3 | |
| Pan Type Mixer 100 Liters | 3 | |
| Large Capacity Sampler Splitter | 3 | |
| Riffle Box 30mm Slot | 3 |  |
| Air Content Meter | 3 | |
| Flow Table | 3 | |
| SP. Gravity Apparatus | 3 | |
| Electronic Balance 150kg. | 3 |  |
| Bulk Density Measure 10 Liters | 3 | |
| Cube Molds 150 x 150 x 150 | 500 | |
| 30mm Dia Sieve Set 37.5 - 63um | 3 | |
| Flakiness Index Set BS EN | 1 |  |
| Electronic TDS Meter | 1 | |
| Electronic PH Meter | 1 | |
| Hydrometer | 3 | |



Sabea Ready Mix is powered by Fully equipped laboratory with qualified personnel carry out various tests on incoming raw materials for their quality compliances with QCS 2014 and respective BS & ASTM standards prior to their usage.



Tests and trials are carried out at regular intervals for performance and durability aspects of concrete and results are documented.




Each transit mixer of concrete, leaving the plant is inspected for its quality compliances prior to their dispatching to the respective sites.

Tests are carried out on regular basis to check and record various aspects of plastic as well as hardened concrete.




Monthly Statistical Analysis as per ACI 214 is carried out to examine if there is any major deviation in the consistency in quality.

All the in-house laboratory tests are complimented with testing at reputed external laboratory at prescribed intervals for further verification purpose.

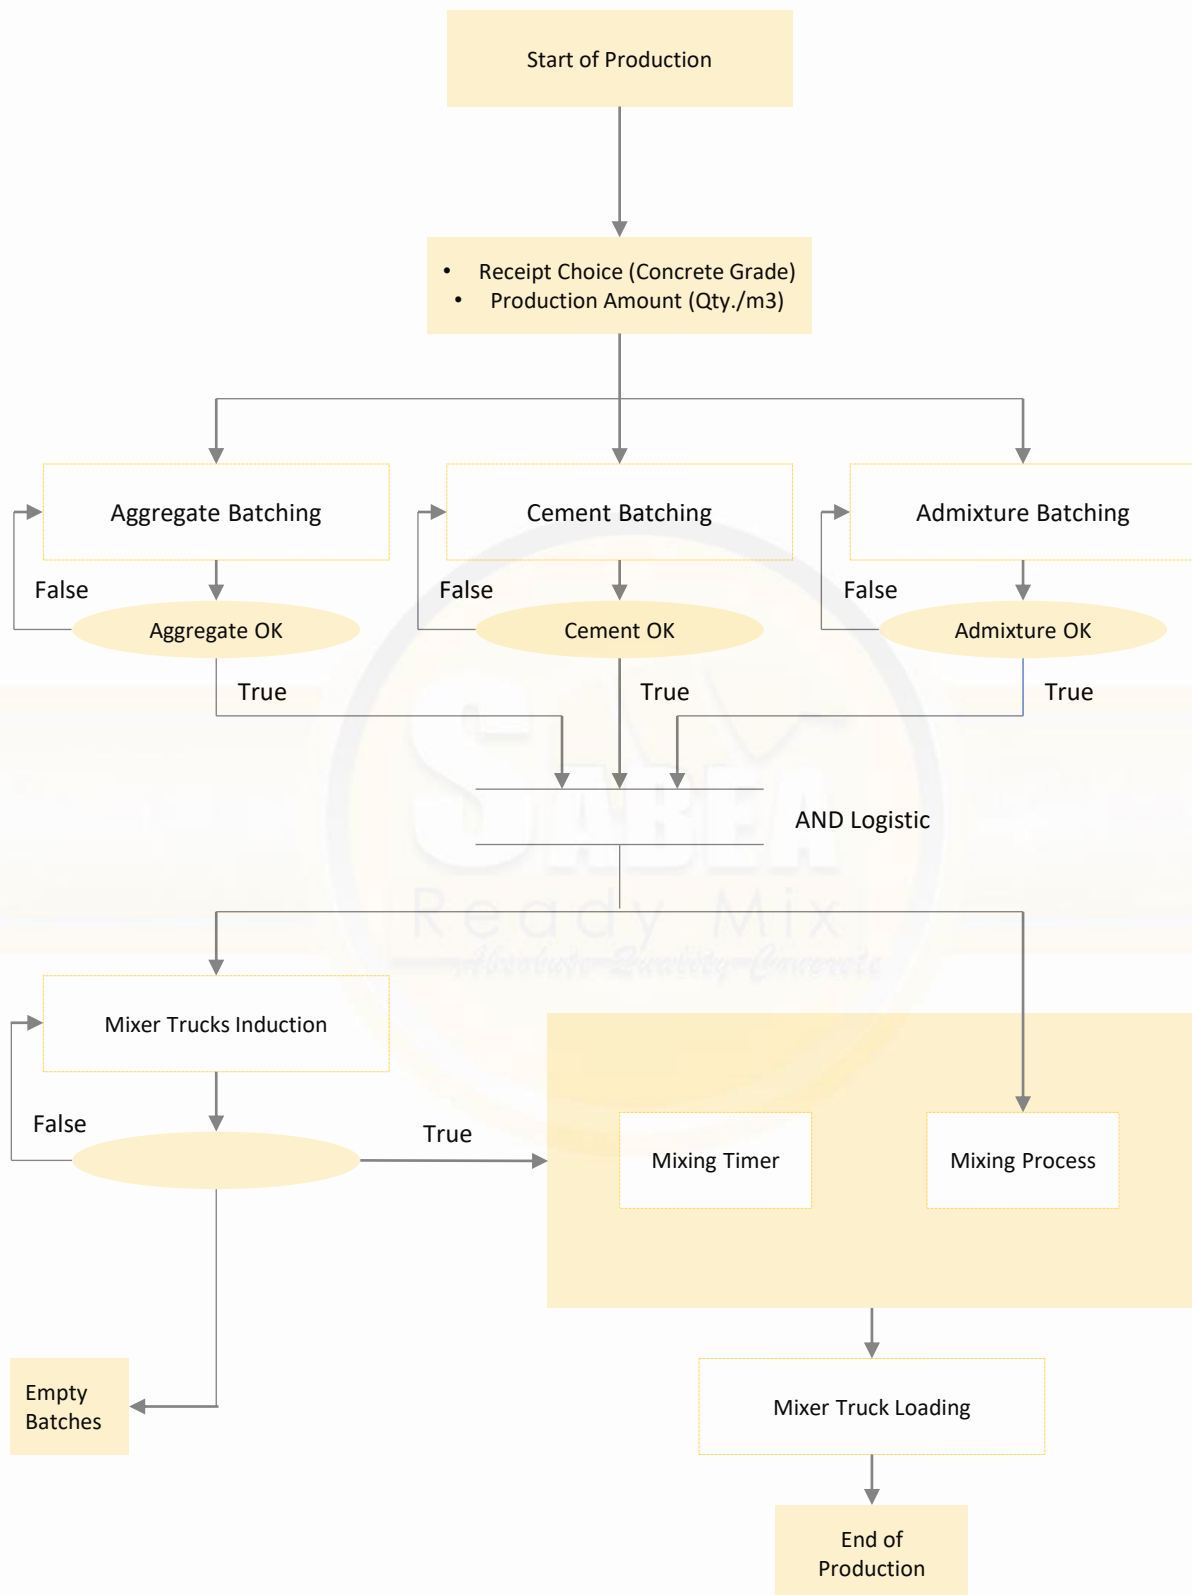



| No's | Test | Standards | Testing Frequently | |
|----------|----------------------------------|----------------------|---------------------|-------------------------------|
| A | AGGREGATES | | In House | Independent Laboratory |
| 1 | Sieve Analys | BS EN 933-1 | Each production day | Once Every 3 Months |
| 2 | Particle Density | BS EN 1097-6 | Once A week | Once Every 3 Months |
| 3 | Water Absorption | BS EN 1097-6 | Once A week | Once Every 3 Months |
| 4 | Flakiness Index | BS EN 933-3 | Once A week | Once Every 3 Months |
| 5 | Shape Index | BS EN 933-4 | Once A week | Once Every 3 Months |
| 6 | Shell Content | BS EN 933-7 | Each production day | Once Every 3 Months |
| 7 | Clay Lumps and friable particles | ASTM C 142 | Once A week | Once Every 3 Months |
| 8 | Los Angeles Abrasion | BS EN 1097-2 | | Once Every 3 Months |
| 9 | Soundness | BS EN 1367-2 | | Once Every 3 Months |
| 10 | Organic Impurities | ASTM C40 | | Once Every 3 Months |
| 11 | Light Weight Pieces | ASTM C 123/C 702 | | Once Every 3 Months |
| 12 | Acid Soluble Sulphate Content | BS EN 1744-1 | | Once Every 3 Months |
| 13 | Acid Soluble Chloride Content | BS EN 1744-5 | | Once Every 3 Months |
| 14 | Moisture Content | BS 812-109 | Twice Daily | |
| B | AGGREGATES | | In House | Independent Laboratory |
| 1 | Cement (Physical &Chemical) | BS EN 197-1 | | Once Every 3 Months |
| 2 | Fly Ash,(Physical &Chemical) | ASTM C 618 | | Once Every 3 Months |
| 3 | GGBS (Physical &Chemical) | BS EN 1962 | | Once Every 3 Months |
| 4 | Microsilica (Physical &Chemical) | ASTM C 1240 | | Once Every 3 Months |
| 5 | Water (Chemical & Physical) | QCS 2014 SECTION 5.2 | | Once Every 3 Months |
| C | FRESH CONCRETE | | In House | Independent Laboratory |
| 1 | Slump Test | BS EN 12350-2 | Randomly | As and when required |
| 2 | Concrete Temperature | ASTM C 1064 | Randomly | As and when required |
| 3 | Unit Weight of Concrete | BS EN 12390-7 | Randomly | As and when required |
| 4 | Air Content | BS EN 12350-7 | Randomly | As and when required |
| 5 | Making and Curing of Cube | BS EN 12390-2 | Randomly | As and when required |
| D | HARDENED CONCRETE | | In House | Independent Laboratory |
| 1 | Compressive Strength | BS EN 12390-3 | Randomly | As and when required |
| 2 | RCPT | ASTM C 1202 | | As and when required |
| 3 | Water Permeability | BS EN 12390-8 | | As and when required |
| 4 | ISAT | BS 1881-5 | | As and when required |
| 5 | Chloride/Sulphate Content | BS 1881-124 | | As and when required |

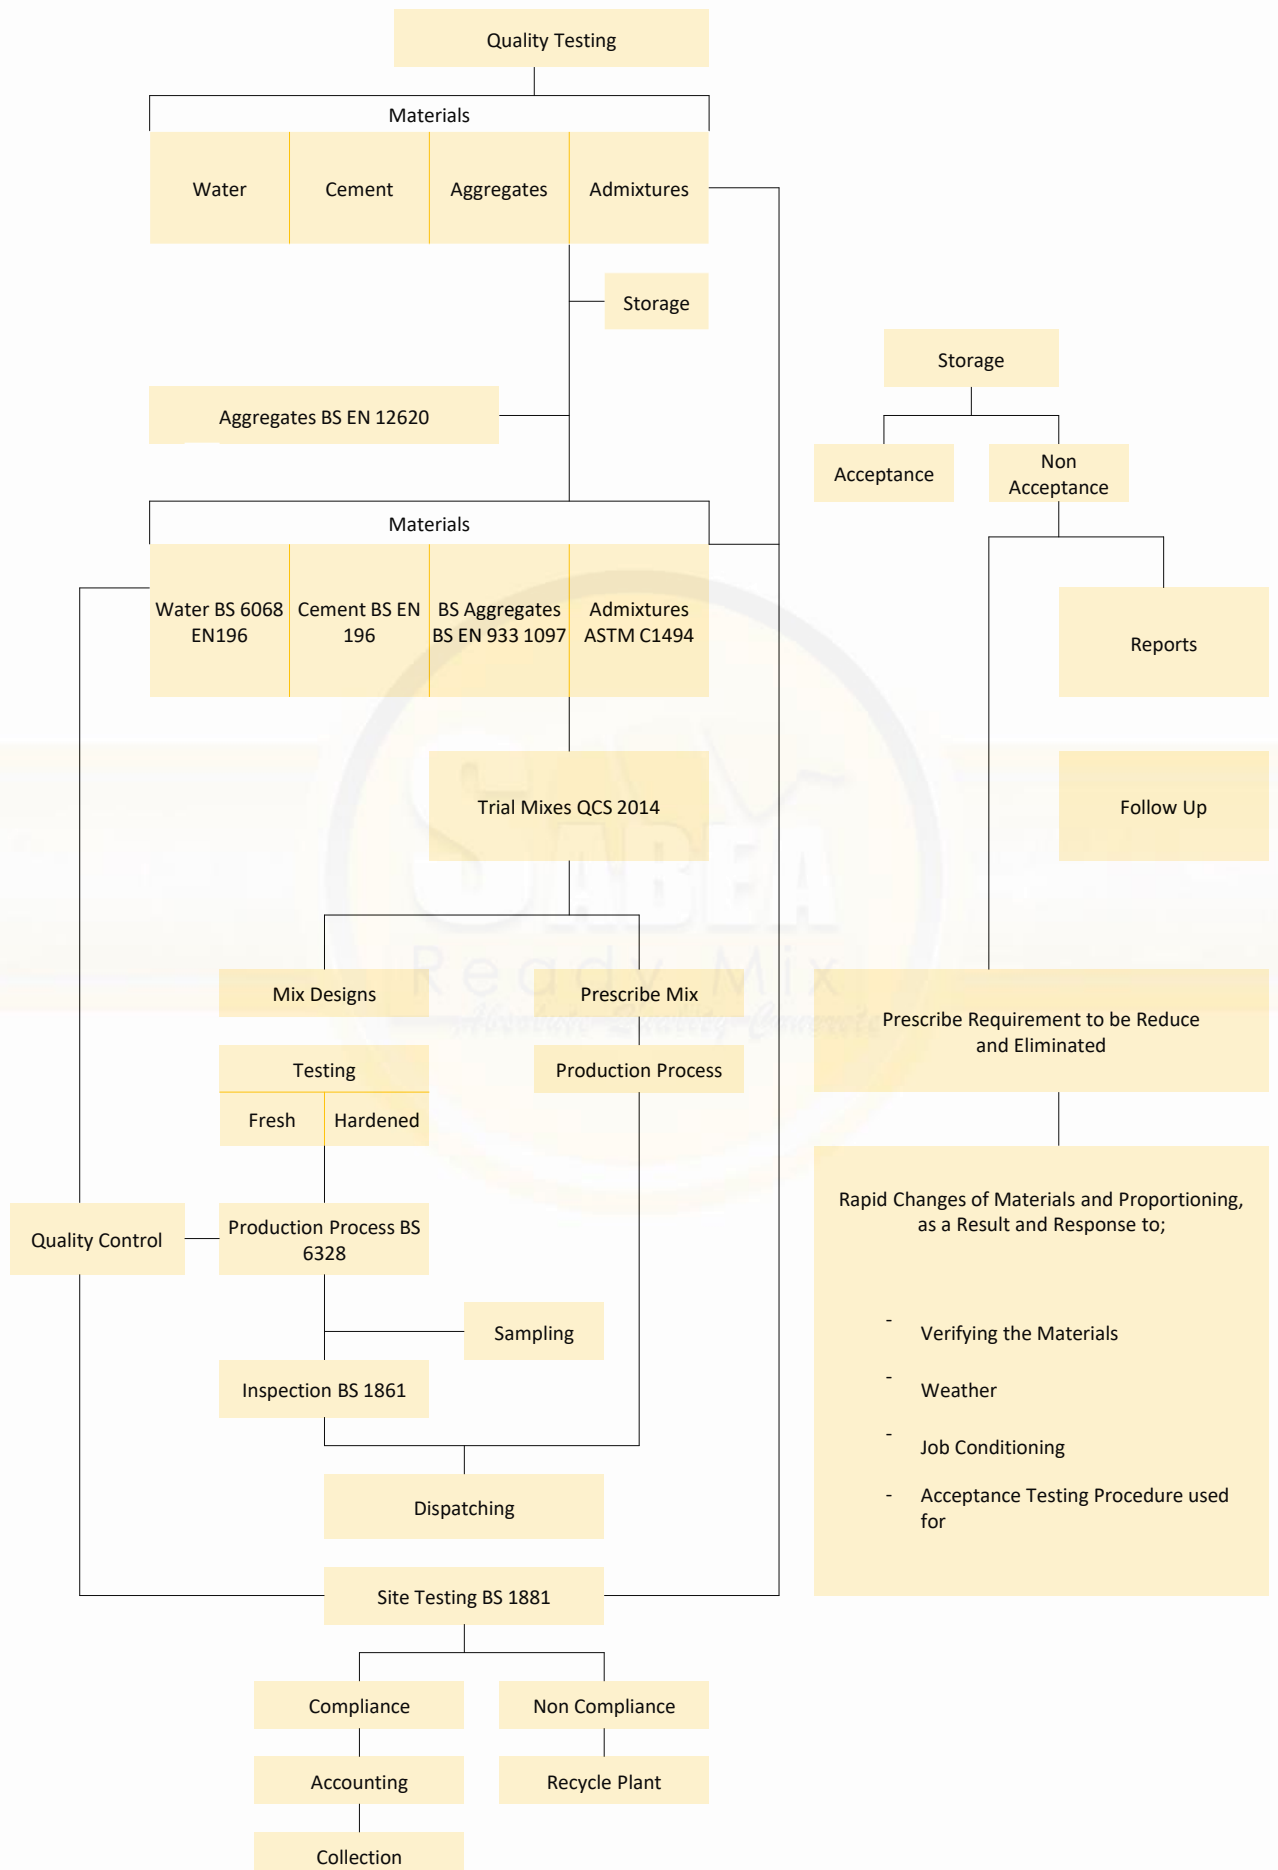



Sabea Ready Mix ensures the highest quality by sourcing raw materials from trusted suppliers that strictly comply with QCS 2014, BS, BS-EN, and ASTM standards.



Cement

Sourced from QNCC and Gulf Cement, Qatar's leading cement producers, ensuring premium quality.




Supplementary Cementitious Materials

Utilizes Micro Silica, GGBS, and Fly Ash from reliable suppliers, rigorously tested for compliance with relevant international standards.



Aggregates

- **Coarse Aggregates:** Crushed aggregates conforming to BS and ASTM standards, sourced from trusted crushers in Sohar, Oman, with proven reliability.
- **Fine Aggregates:** Supplied by Qatar Sand Washing Plant (a QNCC Unit).

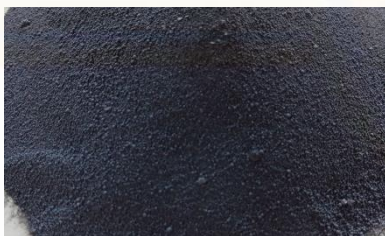

Water

Only potable water from Kahramaa is used in all mixes.



Admixtures

Chemical admixtures are sourced from world-renowned manufacturers, including:



- BASF (Germany)
- CHRYSO (France)
- DCP (United Kingdom)



All admixtures comply with BS and ASTM standards.

On-Going Major Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------|-----------------------|
| 20 | New 132/11kV Al Wakra & Al Wukair Sewage Treatment Plant Primary Substation - Berkat Al Awamer | Voltage Engineering Ltd. |  |  | June 2024 - Present | - |
| 21 | Construction, Completion and Maintenance Works for Zad Qatar Flour Mills Hamad port | BIN ABAD Trading and Contracting Co, |  |  | July 2024 - Present | - |
| 22 | Design & Build FADAAT Studio Scape at Wadi Al Banat | Arab United Construction W.L.L. (ARCON) |  |  | July 2024 - Present | - |
| 23 | Wakrah Wukair Sewage Treatment Plant | Al Aali International for Trad & Cont. W.L.L. |  |  | July 2024 - Present | 74,750 + |
| 24 | GEWAN Island Hotel and Beach Club Package - The Pearl, Qatar | REDCO International W.L.L. |  |  | September 2024 - Present | - |
| 25 | Refurbishment and Repair Works of Qatar National Theatre | Doha Group Trading Contracting Company |  |  | September 2024 - Present | - |
| 26 | Construction of Residential Building (2B + G + 4) at Fox Hills District, Lusail | ERAM Equipment Rental, Trad & Cont. W.L.L. | H.E. Mr. Mohamed Bin Yousef Abdelrahman Al Manna |  | September 2024 - Present | - |
| 27 | Bin Al Sheikh Twin Tower at Marina District, Lusail | BIN ABAD Trading and Contracting Co, |  | - | October 2024 - Present | - |
| 28 | YASMINE Retail & Residential Building (3B + G + 8F + PH) - Rawdat Al Khail | RAMACO Trading and Contracting Co. W.L.L. |  |  | October 2024 - Present | 20,000 + |
| 29 | Demolition and reconstruction of the "M2000+IM5A" Mosque - Al Kaaban Area | AL WATHNA Enterprises |  |  | October 2024 - Present | - |
| 30 | Residential Compound (104) (G+1+PH) Villa + Guard Room (G+1) + Clubhouse (B+G+1) + Substation, Al Fardan Garden 10 at Abu Sidra, Al Rayyan | RAMACO Trading and Contracting Co. W.L.L. |  |  | November 2024 - Present | 32,000 + |
| 31 | (J-13) Mix Use Building (2B+G+4F) at Al Markhiya | JANAS Trading and Contracting Company | Sheikh salman bin mohammed Al thani |  | November 2024 - Present | - |
| 32 | Provision of A Link Bridge Connecting Al Wakra Hospital with AL MAHA Pediatric Specialized Care Center (WC.AW.20) | Arab United Construction W.L.L. (ARCON) |  |  | December 2024 - Present | - |
| 33 | Construction of Ahli Bank Mixed Use Tower (3B + G + 4 Plinth + 23 Typ. + Roof) (Package - 02) - Main Work Package | RAMCO Trading & Contracting Co, W.L.L. |  |  | December 2024 - Present | - |
| 34 | EPC of Al Wakra & Al Wukair Sewage Treatment Plant | GEC Contracting Services & Trading |  |  | December 2024 - Present | 44,141 + |
| 35 | Design and Build of Construction of Renad Academy - Education City, Ar-Rayyan | AL ATTIYAH Architectural Group Holding |  |  | February 2025 - Present | - |
| 36 | Doha Oasis Extension 4 Basements + Ground + Mezzanine + 10 Floors + Roof at Mushaireb, Doha | DOHA GROUP Trading & Contracting |  |  | May 2025 - Present | - |
| 37 | | | | | | |
| 38 | | | | | | |

On-Going Major Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------|-----------------------|
| 1 | Doha New Embassy Compound (NEC) - Wadi AL Banat Lusail District | American International Contractors Inc. (AICI) |  | - | January 2022 - Present | 19,523.00 + |
| 2 | Design and Build for Al Asmakh Area 02 & 03 | Al Ali Engineering Co, W.L.L |  |  | May 2022 - Present | - |
| 3 | Construction of Residential Tower (3B + G + 19 Floors + 2 PH + Roof) - Waterfront District - Res/45, Lusail | AL ATTIAH Architectural Group Holding | Dr. Hajar Ahmad H B Al-Bin Ali |  | April 2023 - Present | - |
| 4 | Commercial & Residential Building (2B + G + M + 10) at Msheireb Downtown Doha | International Decoration & Contracting Co, W.L.L. | Mr. Khalifa AL Rabban |  | April 2023 - Present | - |
| 5 | J46: Al Wa'ab City Central District Phase II - Al Waab City | DOMOPAN Qatar |  |  | June 2023 - Present | - |
| 6 | AL OKAR Residential Tower (2B + G + M + 19 + 2P) - RES/04 Waterfront District, Lusail | AL SEAL Contracting & Trading Co, W.L.L | Mr. Mohammad Al Okar |  | August 2023 - Present | - |
| 7 | Construction, Completion & Maintenance of Police College Complex - Mebaireek, Al Rayyan | Al Ali Engineering Co, W.L.L. |  |  | - | - |
| 8 | Construction, Completion & Maintenance of Commercial Offices and Buildings - AWQAF (866) (B + G + M + 1st) - Abu Hamour | Al Ali Engineering Co, W.L.L. |  |  | September 2023 - Present | - |
| 9 | Construction of Qatar Charity Residential Building (2B + G + 26) - Marina COM 47 Phase 2, Lusail | Al Huda Engineering Works |  |  | September 2023 - Present | - |
| 10 | Construction of Buildings (MU 02 - MU 03 - MU 04 - MU 27) at Yasmeen City, Lusail | AL ATTIAH Architectural Group Holding |  |  | October 2023 - Present | - |
| 11 | Design and Construction of Zekreet Camp "Development of Buildings and Infrastructure"- ISF | Al Ali Engineering Co, W.L.L. |  |  | December 2023 - Present | - |
| 12 | Construction of Residential Buildings A-07 & A-18 (2B + G + 4) - Foxhills, Lusail | Al Huda Engineering Works |  |  | January 2024 - Present | - |
| 13 | VOYA Residential Tower (2B + G + 19F + 2PH) - Waterfront Residential / 26 District, Lusail | AL ATTIAH Architectural Group Holding |  |  | January 2024 - Present | - |
| 14 | AP-15 Residential Apartment Building 2B + G + 6 - The Pearl, Qatar (GV Apartment - 15) | AL SEAL Contracting & Trading Co, W.L.L. |  |  | January 2024 - Present | - |
| 15 | Doha New Embassy Compound (NEC) - Wadi AL Banat Lusail District | American International Contractors Inc. (AICI) | - | - | January 2022 - Present | 19,523.00 + |
| 16 | Construction Works for Qatar Academy Sidra - Education City, in North Campus | Al Ali Engineering Co, W.L.L. |  |  | March 2024 - Present | - |
| 17 | Design and Build of Al Masluba Farm - Zone 71 Wadi Al Waab Al Mazrooah | Al Ali Engineering Co, W.L.L. |  |  | April 2024 - Present | - |
| 18 | Ahli Bank Headquarters and Complex (3B + G + 4 Plinth + Clubhouse + 23) - Lusail Marina Com 16 | RAMCO Trading & Contracting Co, W.L.L. |  |  | May 2024 - Present | - |
| 19 | Bin Al Sheikh Holding Bin G + 15 Tower at Marina District, Lusail | BIN ABAD Trading and Contracting Co, |  |  | May 2024 - Present | - |

Completed Major Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-----------------------|
| 1 | Ministry of Interior (MOI) | WCT Berhad |  المشترى العمومي الخاص Private Engineering Office |  | April 2011 - 2016 | 234,688.00 |
| 2 | Labour City - Messaimmer | Al Ali Engineering Co, W.L.L. |  المشترى العمومي الخاص Private Engineering Office |  | December 2011 - 2016 | 352,771.50 |
| 3 | Doha Grand Park 1, 2, 3A - 3B Al Bidaa Park 5, 6, 7A - 7B Doha Grand Park Al Bidaa Park | Al Ali Engineering Co, W.L.L. BOJAMHOOR Trading & Contracting Co, W.L.L. General Engineering Technologies |  المشترى العمومي الخاص Private Engineering Office |  | July 2014 - 2017 May 2015 - 2017 April 2015 - 2017 | 208,015.00 |
| 4 | Coast Guard Base Marina Coast Guard Base Building | General Engineering Technologies |  المشترى العمومي الخاص Private Engineering Office |  | January 2014 - 2018 | 159,137.50 |
| 5 | Salwa Resorts - Abu Samra | Contraco W.L.L. Site Based Batching Plants |  المشترى العمومي الخاص Private Engineering Office |  | May 2015 - November 2019 | 300,000.00 |
| 6 | Salwa Resorts - Abu Samra Dahab Mountains - Abu Samra | Al Ali Engineering Co, W.L.L. Site Based Batching Plants |  المشترى العمومي الخاص Private Engineering Office |  | May 2015 - November 2019 | 430,000.00 |
| 7 | Palace of Vendome Mall | CRC Dorra Construction & Reconstruction Eng. Co, |  Al Mirqab Capital Business Trad. Co, BHREIC |   | November 2015 | 200,000.00 |
| 8 | Dahab Mountains - Abu Samra | Al Ali Engineering Co, W.L.L. Site Based Batching Plants |  المشترى العمومي الخاص Private Engineering Office |  | May 2015 - November 2019 | 180,000.00 |
| 9 | National Service Training Academy Camp - Al Mazrooah Um Salal Mohamed | Al Bandy Engineering Co, W.L.L. |  |  | June 2016 - 2019 | 73,975.00 |
| 10 | HD - 109 - 01 - Al Shamal Road Exit No. 54 | Al Bandy Engineering Co, W.L.L. Site Based Batching Plants |  |  | January 2018 - October 2019 | 200,000.00 |
| 11 | Al Bustan Complex | Al Bandy Engineering Co, W.L.L. | - |  | May 2014 - 2018 | 50,000.00 |
| 12 | BARWA Al Baraha Phase II | CRC Dorra Construction & Reconstruction Eng. Co, |  |  | March 2014 - 2016 | 50,000.00 |
| 13 | Shield - 5 Program Packages S2 - Al Khor, S3 - Ras Laffan, S5 Mesaieed and S7 Al Udeid Abu Samra | Al Seal Contracting & Trading Co, W.L.L. and American International Contractors Inc. JV |  |  | January 2018 - December 2020 | 75,000.00 |
| 14 | HQ of Gen. Directorate (New Immigration Department) - Wadi Al Banat, Qatar | Al Aali International for Trad & Cont W.L.L. |  State of Qatar Ministry of Interior |  | September 2016 - December 2020 | 200,000.00 |
| 15 | Development of Internal Security Force (ISF) Camp Health Centre - Al Duhail | Al Ali Engineering Co, W.L.L. |  |  | June 2019 - February 2021 | 30,000.00 |
| 16 | Design & Construct / Orbital Highway & Truck Route CONTRACT: C2 - Salwa Road to North Relief Road (P023) - NOH2 - Orbital Highway Contract (Bu Fesseela) | QDVC P.Q.S.C. (Qatari Diar Vinci Construction) |  |  | June 2020 - 2021 | - |
| 17 | Shield 1: L1 - Al Thakira, L2 - Al Zubara, L3 - Dukhan L4 - Inside of Doha, L5 - Nakash and L7 - Al Kharara | Al Darwish Engineering Co, W.L.L. |  |  | January 2019 - 2021 | 11,395.00 |
| 18 | CPC07e: Construction Works of Officer's Club & Shooting Range - Al Duhail | Al Ali Engineering Co, W.L.L. |  |  | January 2020 - November 2021 | 70,000.00 |
| 19 | Al Mashaf Mall B + G + M - Al Wukair Mall | DAIEN Projects Management & Construction |  |  | November 2019 - 2021 | 11,395.00 |





























Completed Major Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------|-----------------------|
| 20 | Design & Build for Modification and Additional Works to Existing 16 Schools Package 1 and Package 2 | AMANA Qatar Contracting - Doha |  |  | November 2019 - 2021 | 8,000.00 |
| 21 | 8432 EAST 200 - Construction of Storage Bunker - Umm Taka Qaf, Ash Shahaniyah | Al Nasr Construction Dynamics | M B D A |  | March 2020 - 2021 | 5,960 |
| 22 | Proposed Data Center Complex Phase 1 - Mesaimeer | Al Aali International for Trad & Cont W.L.L. |  |  | March 2020 - 2021 | - |
| 23 | P191: Proposed Al Ahli Hospital Extension | Noors Engineering Co, W.L.L. |  |  | January 2019 - 2021 | 20,000.00 |
| 24 | AMIRI GUARD Buildings - Lusail | Al Ali Engineering Co, W.L.L. |  |  | April 2019 - 2021 | - |
| 25 | North Plaza Mall - Umm Al Amad, Umm Sala | AL WATHNA Enterprises | Sheikh Faisal Bin Khalifa Al-Thani |  | October 2020 - 2021 | - |
| 26 | Construction of Additional Facilities for the Community College of Qatar - Girls | AMANA Qatar Contracting - Doha |  |  | November 2019 - 2021 | 15,834.00 |
| 27 | AMIRI DIWAN | Al Ali Engineering Co, W.L.L. |  |  | April 2021 - 2021 | - |
| 28 | SA033 RIW in Various Areas of Qatar Southern Areas (SC) | Turnkey Trading & Contracting (T.T.C.) |  |  | July 2021 - January 2022 | - |
| 29 | Construction of 4 Bus stations - Sudan, Lusail, Education City & Al Wakrah Bus Stations | BOJAMHOOR Trading & Contracting Co, W.L.L. |  |  | October 2020 - January 2022 | - |
| 30 | Evaporated Milk Factory, Plant - 04 at BALADNA Food Industries - Umm Al-Hawaya Area, Al Khor | AL MUNTASSER Contracting and Trading GOLDEN BAY Contracting & Trading |  |  | October 2021 - June 2022 | - |
| 31 | Design and Build of MOI TENBEK Hospital - Al Khor | Al Ali Engineering Co, W.L.L. |  |  | August 2019 - July 2022 | 18,000.00 |
| 32 | Design & Build of Amiri Terminal | Al Ali Engineering Co, W.L.L. |  |  | April 2021 - August 2022 | - |
| 33 | Lusail Development Project, Phase II CP07-C-1B | WCT Berhad and Al Ali Engineering Co, W.L.L. JV |  |  | April 2015 - August 2022 | 500,000.00 |
| 34 | Design & Build Al Shyukh Port Phase -01 - Corniche Al Jasra | Al Ali Engineering Co, W.L.L. |  |  | June 2022 - November 2022 | - |
| 35 | CP 31- Fixed & Call off Works of Electrical Reinforcement Works - Lusail City | Voltage Engineering Ltd. |  |  | April 2021 - 2022 | - |
| 36 | Trans-Regional Logistic Complex (TRLCL) / W912ER21C0005 - Al Udeid AB, Salwa Road Exit No. 29 Abu Nakhla | Al Nasr Construction Dynamics |  |  | May 2021 - 2022 | - |
| 37 | Q Data - Data Center - 2 - Qatar Free Zone - Umm Al Houf | AMANA Qatar Contracting - Doha |  |  | January 2022 - December 2022 | - |
| 38 | Mall of Qatar - Grand Zone School & Residential - Al Rayyan - Dukhan Highway | Al Ali Engineering Co, W.L.L. |  |  | July 2019 - Present | 250,000.00 |

Completed Major Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------|-----------------------|
| 39 | Design and Build for Al Asmakh Area 01 | Al Ali Engineering Co, W.L.L. |  |  | November 2020 - 2022 | - |
| 40 | Structural Renovation of Fourteen (14) Number of Old Schools in Various Locations - Package - 02 | DOHA GROUP Trading & Contracting |  |  | August 2022 - January 2023 | - |
| 41 | QAF - Special Forces Training Center / Geotechnical Investigation Work | GAP INSAAT / Contraco W.L.L. |  |  | November 2020 - 2023 | - |
| 42 | GWC Logistics Park, Al Wukair Phase 2 - Package - 1 | Al Ali Engineering Co, W.L.L. |  |  | March 2022 - 2023 | 163,183.00 + |
| 43 | Design and Built of Additional Works at Amiri Guard Camp Lusail | Al Ali Engineering Co, W.L.L. |  |  | October 2022 - 2023 | - |
| 44 | Design & Build for Rehabilitation and Renovation of Jawaan School -Al Markhiya | DOHA GROUP Trading & Contracting |  | - | September 2022 - January 2024 | - |
| 45 | Construction of Administration Building - Al Wakrah | IMAR ISTANBUL Contracting & Trading Co, | - |  | March 2023 - January 2024 | - |
| 46 | Construction, Completion and Maintenance Works for New Two (2) Schools (B + G + 2), Secondary & Kindergarten - Al Wukair | LEXUS Engineering & Contracting | Shk. Khaled Alabdrahman Al Thani |  | August 2023 - January 2024 | - |
| 47 | Construction, Completion and Maintenance Works (G + M Commercial Shops Building) - Southern Logistic, PLOT-AW-LP-A-C1 Al Wukair | LEXUS Engineering & Contracting | General Real Estate Company W.L.L. |  | August 2023 - January 2024 | - |
| 48 | Construction, Completion & Maintenance During Defects and Liability Period Al Nebras International School - Fox Hills, Lusail | AL ATTIAH Architectural Group Holding |  |  | October 2022 - April 2024 | - |
| 49 | Construction of Proposed Al Meera Hypermarket - Ain Khalid | AL ATTIAH Architectural Group Holding |  |  | October 2022 - April 2024 | - |
| 50 | J56: Qatar Technical Institute Perimeter Wall and Guardhouse - Al Udeid AB | DOMOPAN Qatar |  |  | May 2023 - April 2024 | - |
| 51 | Construction of New Swimming Pool at Muliaji Place - Ras Imlaji, Ras Laffan | Al Ali Engineering Co, W.L.L. | QATAR HOSPITAL PALACE |  | February 2024 - July 2024 | - |
| 52 | Construction of Simulation Building in National Service Academy Training Camp - Al Mazrooah | RAMCO Trading & Contracting Co, W.L.L. |  |  | January 2024 - October 2024 | - |
| 53 | Proposed Al Meera Hypermarket & Mix-used Development - Al Mansoura | Al Ali Engineering Co, W.L.L. |  |  | October 2023 - March 2025 | - |
| 54 | | | | | | |
| 55 | | | | | | |
| 56 | | | | | | |
| 57 | | | | | | |

Completed Towers / Buildings Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------|-----------------------|
| 1 | Al Shahed Tower 5B + G + 38F - Westbay, Doha | Al Bandary Engineering Co, W.L.L. | Hamad Abdulaziz Al Kawary |  | December 2016 - September 2019 | 70,000.00 |
| 2 | 2B + G + 20F Residential Tower - Al Kharaj District, Lusail | Al Bandary Engineering Co, W.L.L. |  |  | March 2017 | - |
| 3 | Residential Bldg. 2B + G + PLINTH + 19F - Marina District, Lusail | Al Bandary Engineering Co, W.L.L. | - |  | February 2016 | - |
| 4 | 2B + G + MZ + 4P + 33F + Roof + Mech. Floor Marina Mix 011 Hotel and Residences - Lusail | Al Bandary Engineering Co, W.L.L. | - |  | July 2016 | - |
| 5 | Hilton Tower 3B + G + 42F (Al Thuraya Tower) - Westbay, Doha | Al Bandary Engineering Co, W.L.L. | - |  | October 2016 | - |
| 6 | La Plage Villa East (1B + G + 1 + P + H) - BVS 29 Plot 29 - The Pearl, Qatar | Al Bandary Engineering Co, W.L.L. | Mohamed Abed Al Lattif Al Mana |  | January 2017 | - |
| 7 | Jumana 2 Tower 4P + M + AM + 20F - The Pearl, Qatar | Al Bandary Engineering Co, W.L.L. |  |  | November 2016 | - |
| 8 | BVS 13 to BVS 18 - The Pearl, Qatar | Al Bandary Engineering Co, W.L.L. | - |  | February 2016 | - |
| 9 | Waterfront Residential Twin Towers (WR-Res 19 & 20) (3B + G + 26F + PH) | Al Bandary Engineering Co, W.L.L. | - |  | October 2017 | - |
| 10 | ORYX Proposed Qatar Airways Residential Tower (4B + G + 29 Floors) | Dutch Foundation Co, (Qatar) W.L.L. |  |  | July 2017 | - |
| 11 | Mazoon Tower Al Dafna, Westbay Doha | ORIENTAL Enterprises W.L.L. |  |  | March 2018 | - |
| 12 | Rotana Hotel - Al Mirqab | Al Bandary Engineering | - |  | May 2014 - 2018 | 2,888.00 |
| 13 | 4 No's of Erkyah Residential (2B + G + 10) R-10, R-39, R-46 & R-52 | CRC Dorra Construction & Reconstruction Eng. Co, |  |  | June 2017 - March 2019 | 20,000.00 |
| 14 | Four Season Hotel Apartment (Apartment Hotel Building) - The Pearl, Qatar | AL SEAL Contracting & Trading Co, W.L.L. | H.E SH. Hammad Bin Jassim Bin Jabor Al-Thani |  | July 2020 - 2021 | 32,132.00 |
| 15 | Giardino Village (GV) Gated Compound & G + 3 Apartment Building - The Pearl, Qatar | AL SEAL Contracting & Trading Co, W.L.L. |  |  | July 2020 - 2021 | - |
| 16 | Al Muthaidah Twin Towers - The Pearl, Qatar | AL SEAL Contracting & Trading Co, W.L.L. |  |  | January 2021 - 2021 | - |
| 17 | Terrace District Plot No. RES/01 Residential Building - Foxhills, Lusail | AL ATTIAH Architectural Group Holding | Mr. Khalifa Ali Al Kubaisi |  | February 2021 - June 2022 | 9,326.00 |
| 18 | BURJ DAMAC SEAVIEWS - Proposed B + G + 2P + 30 Storey Residential Building - Plot No. WR. Res. 07 Lusail City | DRAIEH Contracting W.L.L. |  |  | October 2019 - May 2022 | 25,592.00 |
| 19 | DUKHAN Bank Head Quarter Commercial & Offices Tower - Plot No. Com 02. Marina District Lusail | GOLDEN BAY Contracting & Trading |  |  | January 2021 - 2022 | - |

Completed Towers / Buildings Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|----------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------|
| 20 | Residential Building 2 Basement + G + 25 Floors - Waterfront District, Lusail WR-RES/33 | AL ATTIAH Architectural Group Holding | Mr. Khalifa Ali Khalifa Al-Kubaisi |  Dorsch Qatar | March 2021 - November 2022 | - |
| 21 | Construction of Residential Tower B + G + P + 19 + PH at Plot Res - 13 Marina District - City of Lusail | RAMACO Trading & Contracting Co, W.L.L. |  UNION TRUST CO. W.L.L. |  LACASA Architects & Engineering Consultants | April 2022 - April 2023 | 17,115.00 + |
| 22 | Proposed 2B + G + 3P + 23 Typical Floors Residential Building - PLOT Marina-Mix 004, Marina District Lusail City | AL ATTIAH Architectural Group Holding | Sheikh Mohamed Bin Khalid Al Thani | AL-ALAMEIA Engineering Consultant | June 2021 - April 2023 | - |
| 23 | FLORESTA GARDENS Landmark Tower (107 & 108) - The Pearl, Qatar | AL SEAL Contracting & Trading Co, W.L.L. | Al Naseem Towers for Real Estate Development W.L.L. |  MZ & PARTNERS ARCHITECTURAL & ENGINEERING CONSULTANCY | October 2021- December 2023 | - |
| 24 | Floresta Garden Residential Tower (FG106) - The Pearl, Qatar | RAMACO Trading & Contracting Co, W.L.L. |  المتحدة للتنمية UNITED DEVELOPMENT CO. |  HTCO HANY TAWYK CONSULTING OFFICE | July 2022 - December 2023 | - |
| 25 | NBK SQUARE I & II: Mercedes Flagship Building / (4B + G + M + 10F) and 2 Residential (4B + G + 10F) - Msheireb, Doha | National Industrial Contracting Co, W.L.L. |  DCB |  ناصر بن خالد الخدمات NASSER BIN KHALID SERVICES | September 2019 - January 2024 | 75,000.00 |
| 26 | ALURJWAN - Residential Building 2B + G + 20 Story - Plot No. R22-23-24 Al Erkyah, Lusail City | AL ATTIAH Architectural Group Holding | Sheikh Abdulrahman Hamad Al-Thani |  LACASA Architects & Engineering Consultants | September 2022 - January 2024 | - |
| 27 | FJ Residential Tower II (3B + G + Tech + 21F + Bulkhead - Tech + Roof) at Mix-028, Marina, Lusail City | RAMACO Trading & Contracting Co, W.L.L. | Mr. Fahad Y. Jaidah |  fd consult | September 2022 - 2024 | 7,800.00 + |
| 28 | Apartment Building (2B + G + 6F + PH) AP-14 - Giardino Village The Pearl, Qatar | RAMACO Trading & Contracting Co, W.L.L. | Mr. Mohamed Abdulla Abdulghani & Mr. Abdulrahman Abdullah Abdulghani |  مجموعة الخليج الاستشارية GULF CONSULTING GROUP | September 2023 - 2024 | - |
| 29 | Residential Building 3B + G + 15 Storey Plot Pin No. Marina-Res 012, Lusail City | Al Huda Engineering Works |  LeMirage REAL ESTATE |  LACASA Architects & Engineering Consultants | January 2023 - 2024 | - |

Project Approvals

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------|
| 1 | CP07-B Lusail Plaza Infrastructure, LRT Station, Public Car Parks and Landscape | QD-SBG Construction W.L.L. |  |   | June 2020 | - |
| 2 | Design & Build Works for Lusail Plaza Towers - Plot 1 (BP12A) & Plot 2 BP12B | QD-SBG Construction W.L.L. & MIDMAC - MIC Construct JV |  |    | June 2020 | - |
| 3 | Al Rawdah & Academy Project P212 - Rawdat Al Hamamah | Al Bandy Engineering Co, W.L.L. |   |  | July 2020 | - |
| 4 | FLORESTA GARDENS Gated Compound Villas (A, B & C) - The Pearl Qatar | RAMACO Trading & Contracting Co, W.L.L. |  |  | October 2019 | - |
| 5 | Residential Building (2B + G + 14 + 2PH) Plot Res. 32 - Al Kharaej District, Lusail | PRIDE Projects W.L.L. |  |  | November 2019 | - |
| 6 | QETAIFAN Island North Hotel - Package 5 Hotel | Al Jaber Trading & Contracting Co, W.L.L. |  |  | November 2020 | - |
| 7 | Design and Build for Upgrade of Lusail Circuit | UrbaCon Trading and Contracting W.L.L. GOLDEN BAY Contracting & Trading |  |  | November 2020 | - |
| 8 | Design, Construction, Completion and Maintenance of Labour Camp and Integrated Families Housing | UrbaCon Trading and Contracting W.L.L. VISUAL Projects |  |  | October 2021 | - |
| 9 | ALBAKER Tower Hotels - Al Dafna, West Bay Area | REDCO International - Almana |  |  | November 2021 | - |
| 10 | SHOURA Council Building Extension | REDCO International - Almana |   |  | November 2021 | - |
| 11 | Infrastructure and Security System for Development of Government Buildings in Southwest of the Country | TADMUR Contracting W.L.L. |  |  | December 2021 | - |
| 12 | CP07A3 Landscape Works for Seef Lusail | Al Jaber and Partners W.L.L. |  |  | September 2021 | - |
| 13 | National Service Academy Training Camp - Al Mazrooah Umm Salal | RAMCO Trading & Contracting Co, W.L.L. |  |  | December 2022 | - |
| 14 | Construction of College of Medicine and Health Sciences at Qatar University - Education City, Ar-Rayyan | BOJAMHOOR Trading & Contracting Co, W.L.L. |  |  | June 2023 | - |
| 15 | Construction of Proposed Al Meera Supermarket - Al Thumama 2 | Arabian Technical Petroleum Services (ATPS) |  |  | March 2024 | - |
| 16 | BS 156 : Veterinary and Agricultural Laboratories (Ashghal) | Porto Holding Group / BRICKSTONE Trading & Contracting |  |  | September 2024 | - |
| 17 | Proposed Residential Building (2B + G + 1P + H.C + 17 Floor) Marina - RES 003, Lusail | SHELTER Group - Qatar W.L.L. | Mr. Nadir Badruddin Badruddin Mohammad |  | December 2024 - Present | - |
| 18 | Hotel Apartment Tower (3B+G+35F+2 Pent + Roof) Waterfront - Mix/18 Lusail | AL-MASAKEN Trading and Contracting Company |  |  | December 2024 - Present | - |
| 19 | | | | | | |

Completed Towers / Buildings Projects


| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|-----------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------|-----------------------------|
| 1 | C-015 Muntazah St. Extension Package 13 | Al Jaber and Partners |  | KBR PARSONS | November 2015 - | Project Approval Only |
| 2 | Roads Surrounding Al Bayt Stadium - QN090 (including QN005-P03) | BIN OMRAN Trading & Contracting L.C.C. |  | PARSONS | June 2018 - November 2018 | 1,316.00 |
| 3 | QPR - Dukhan Road (East Contract) | URBAN Landscape |  | PARSONS | November 2018 - 2019 | 443.00 Exposed Aggregate |
| 4 | Roads and Infrastructure in Salwa Resort - Salwa Abu Samra | BIN OMRAN Trading and Contracting L.C.C. |  | AECOM | January 2018 | Project Approval Only |
| 5 | Roads and Infrastructure in Al Froosh / Al Kharatiyat - Package 01 | Strom Construction L.C.C. |  | AECOM | January 2018 | Project Approval Only |
| 6 | Roads and Infrastructure in Al Froosh / Al Kharatiyat - Package 01 | BIN OMRAN Trading and Contracting L.C.C. |  | AECOM | January 2018 | Project Approval Only |
| 7 | Roads & Infrastructure in West of Mashaf Package - 4 | BIN OMRAN Trading and Contracting L.C.C. |  | PARSONS | May 2018 | Project Approval Only |
| 8 | Infrastructure FS GAPS for Bani Hajer & Al Rayyan Stadium, Foul Sewer Package - 2 (DN117-P02) | BIN OMRAN Trading and Contracting L.C.C. |  | Hyder | May 2018 | Project Approval Only |
| 9 | NOH2 - Orbital Highway Contract 2 | BIN OMRAN Trading & Contracting L.C.C. |  | KBR AECOM | May 2018 | - |
| 10 | QP - Dukhan Road Works | Al Ali Projects |  | - | March 2018 - Present | 2,000.00 |

Completed WOQOOD Projects

| No's | Projects Names | Contractors | Client | Consultant/PM/CM | Date | BOQ and Supplied / m³ |
|------|---------------------------------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------|
| 1 | Construction of WOQOD Fuel Station - Al Thamaid | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | October 2015 | |
| 2 | Construction of WOQOD Fuel Station - Foxhills, Lusail | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | May 2017 | |
| 3 | Construction of WOQOD Fuel Station - Al Thumamah | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | May 2017 | |
| 4 | Construction of WOQOD Fuel Station - Old Salata (Al Mirqab) | Athar Building and Development |  |  Engineering Services Department | October 2017 | |
| 5 | Construction of WOQOD Fuel Station - Wholesale Market, Abu Hamour | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | February 2018 | |
| 6 | Construction of WOQOD Fuel Station - Al Kharaitiyat | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | March 2018 | |
| 7 | Construction of WOQOD Fuel Station - Onaiza, Westbay | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | May 2018 | |
| 8 | Construction of WOQOD Fuel Station - Al Gharafa | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | May 2018 | |
| 9 | Construction of WOQOD Fuel Station - Extension - North University, Wadi Al Banat Area | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | August 2018 | |
| 10 | Construction of WOQOD Fuel Station - | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | | |
| 11 | Construction of WOQOD Fuel Station - Al Khor | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | October 2018 | |
| 12 | Construction of WOQOD Fuel Station - Sealine, Mesaieed | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | February 2019 | |
| 13 | Construction of WOQOD Fuel Station - Al Wajba 2 | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | February 2019 | |
| 14 | Construction of WOQOD Fuel Station - Al Dafna | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | February 2019 | |
| 15 | Construction of WOQOD Fuel Station - Ain Khaled 2 | CDCT - Construction Development Contracting & Trading |  |  Engineering Services Department | February 2019 | |
| 16 | Construction of WOQOD Fuel Station - Al Wajba - 3 | AL ATTIYAH Architectural Group Holding |  |  Engineering Services Department | November 2019 | |
| 17 | Construction of WOQOD Fuel Station - Ash Shahaniyah | AL MAQAM Maintenance & Contracting |  |  Engineering Services Department | January 2020 | |
| 18 | Construction of WOQOD Fuel Station - Lusail - 2 | AL ATTIYAH Architectural Group Holding |  |  Engineering Services Department | November 2020 - Present | |
| 19 | Construction of WOQOD Fuel Station - Sawda Natheel (Desert Oasis) | AL ATTIYAH Architectural Group Holding |  |  Engineering Services Department | October 2021 - Present | |


Wakrah Wukair Sewage Treatment Plant

| | | |
|-----------------|--------------------------------------|---------------------|
| Contractor: | Al Aali International | |
| Client: | Ashghal & Al Wakra Water Contracting | |
| Casting Type: | Raft Foundation | 3,370m ³ |
| Concrete Grade: | C40/50 OPC + 60% GGBS + 5% MS | |

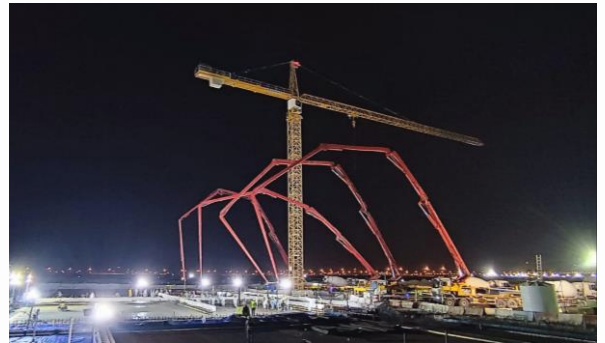


Bin Al Sheikh Holding G + 15 Tower - Marina District, Lusail

| | | |
|-----------------|--------------------------------------|---------------------|
| Contractor: | Bin Abad Trading and Contracting Co, | |
| Client: | Bin Al Sheikh Holding | |
| Casting Type: | Raft Foundation | 3,700m ³ |
| Concrete Grade: | C50/20 OPC + 50% GGBS + 5% MS | |

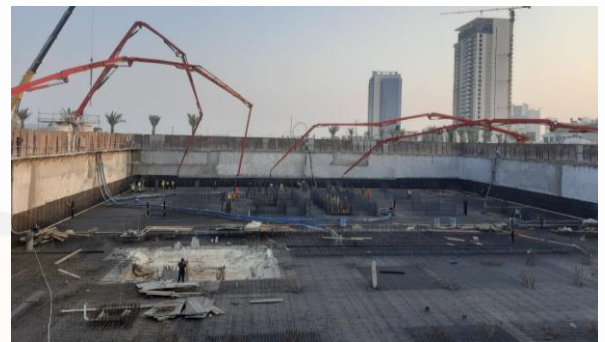


Residential Tower WR-RES/26 (2B + G + 19F + 2P) at Water Front District, Lusail

| | | |
|-----------------|---------------------------------------|---------------------|
| Contractor: | AL ATTIYAH Architectural Construction | |
| Client: | ALNAMAA Real Estate Development | |
| Casting Type: | Raft Foundation | 3,400m ³ |
| Concrete Grade: | 45N OPC + 50% GGBS + 5% MS + CI + WP | |

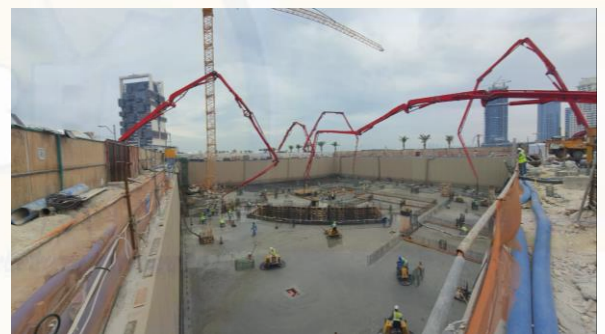


Construction of Residential Tower (3B + G + 19 Floors + 2 PH + Roof) - Waterfront District - Res/45, Lusail

| | | |
|-----------------|---------------------------------------|---------------------|
| Contractors: | AL ATTIYAH Architectural Construction | |
| Client: | Dr. Hajar Ahmad H B Al-Bin Ali | |
| Casting Types: | Raft Foundation | 2,300m ³ |
| Concrete Grade: | 45MPa OPC 50% GGBS + 5% MS | |

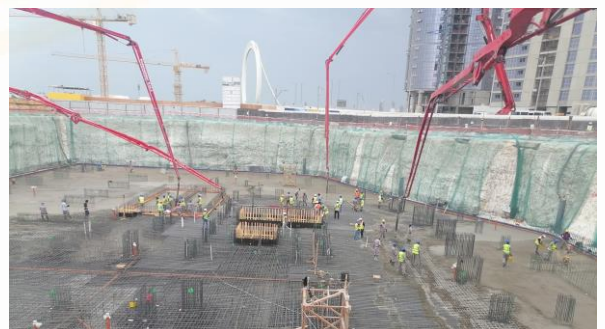

Residential Tower WR-RES/26 (2B + G + 19F + 2P) at Water Front District, Lusail

| | | |
|-----------------|---------------------------------------------|---------------------|
| Contractor: | Al Huda Engineering Works | |
| Client: | LE MIRAGE Real Estate | |
| Casting Type: | Raft Foundation | 1,400m ³ |
| Concrete Grade: | 45N OPC + 50% GGBS + 5% MS (TMS = 55MPa) | |

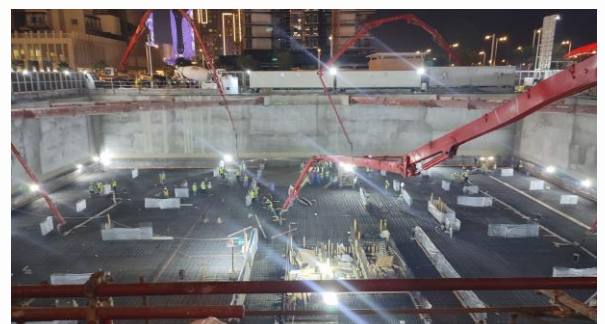


Integrated Training Center for Qatar Armed Forces Joint Special Forces - Wind Tunnel - Sayliyah

| | | |
|-----------------|--------------------------|---------------------|
| Contractor: | CONTRACO W.L.L. | |
| Client: | QAF - Qatar Armed Forces | |
| Casting Type: | Raft Foundation | 1,580m ³ |
| Concrete Grade: | 40N OPC + 30% PFA | |




Construction of Al Ahli Hospital Extension - Bin Omran

| | | |
|-----------------|------------------------------|---------------------|
| Contractor: | NOORS Engineering Co, W.L.L. | |
| Consultant: | United Architects | |
| Client: | Al Ahli Hospital | |
| Casting Type: | Raft Foundation | 6,000m ³ |
| Concrete Grade: | 40N OPC + CI | |

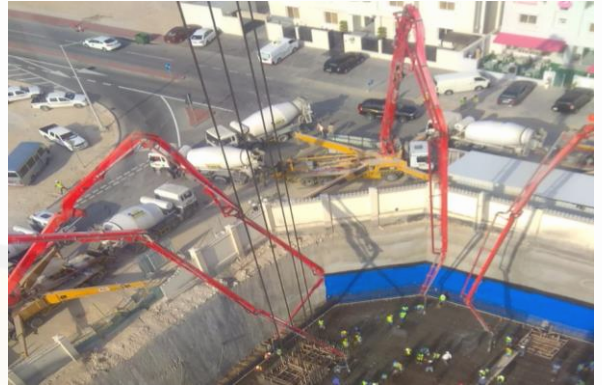

HQ of Gen. Directorate (New Immigration) - Wadi Al Banat

| | | |
|-----------------|----------------------------|----------------------|
| Contractor: | Al Aali International | |
| Consultant: | CEG International | |
| Client: | MOI - Ministry of Interior | |
| Casting Type: | Raft Foundation | 11,000m ³ |
| Concrete Grade: | 40N OPC | |

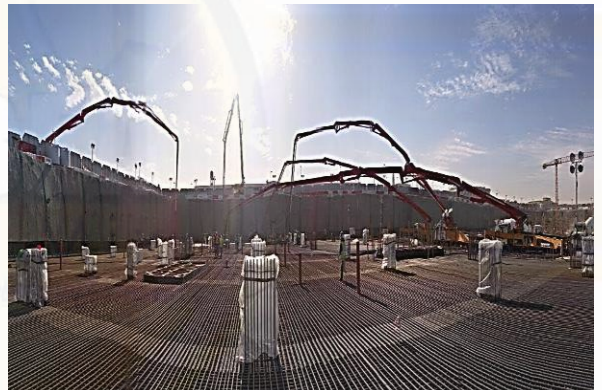


Doha Grand Park and Al Bidaa Park 1, 2, 3, 4, 5, 6, 7 and 8

| | | |
|-----------------|--------------------------------------------------------------------------------|---------------------|
| Contractors: | Al Ali Engineering Co, W.L.L. , Generic Engineering Technologies and Bojamhoor | |
| Consultant: | KEO | |
| Client: | PEO - Private Engineering Office | |
| Casting Types: | Raft Foundation & Slab | 4,000m ³ |
| Concrete Grade: | 45N OPC + 30% PFA | |




Commercial Building - Salwa Road

| | | |
|-----------------|-------------------------------|------------------------------------------------|
| Contractors: | Al Taqwa Way Contracting Co., | |
| Casting Type: | Concrete Raft Foundation | Each Casting Approximately 2,000m ³ |
| Concrete Grade: | 40N OPC 25% PFA + 5% MS | |

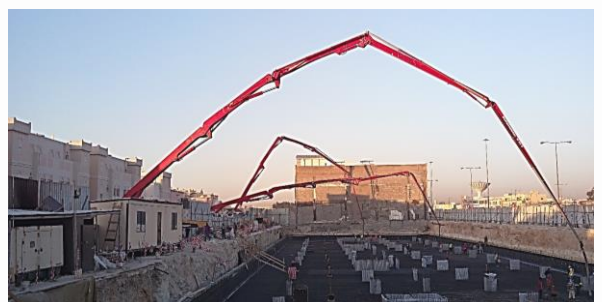

Green House Villas & Water Treatment Plant - Al Jumailiyah

| | | |
|-----------------|-----------------------------------|---------------------|
| Contractors: | Al Bandy Engineering Co, W.L.L. | |
| Consultant: | Eng. Adnan Saffarini Office Qatar | |
| Casting Type: | Raft Foundation | 9,000m ³ |
| Concrete Grade: | 40N OPC + 20% PFA | |

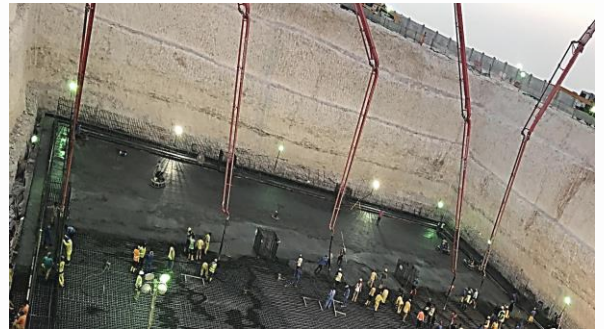

P130: Marina Mix 011 Hotel and Residences - Lusail

| | | |
|-----------------|---------------------------------|---------------------|
| Contractors: | Al Bandy Engineering Co, W.L.L. | |
| Casting Type: | Raft Foundation | 4,000m ³ |
| Concrete Grade: | 50N OPC + 30% PFA + 6% MS | |



Shield - 5 Program Packages S5 - Mesaieed

| | | |
|-----------------|-----------------------------------------------------------------------------------------|------------------------------------------------|
| Contractors: | Al Seal Contracting & Trading Co, W.L.L. and American International Contractors Inc. JV | |
| Consultant: | U.S. Engineering Corps. | |
| Casting Type: | Concrete Raft Foundation & Walls | Each Casting Approximately 1,300m ³ |
| Concrete Grade: | 50N OPC + 25% PFA + 5% MS | |




Hotel & Res. Tower (4B + G + 31) (Mix 034) - The Pearl, Qatar

| | | |
|-----------------|---------------------------------|------------------------------------------------|
| Contractors: | Al Bandy Engineering Co, W.L.L. | |
| Consultant: | ERGA Qatar | |
| Casting Type: | Concrete Raft Foundation | Each Casting Approximately 3,000m ³ |
| Concrete Grade: | 50N OPC + 30% PFA + CI | |



North Plaza Mall - Umm Al Amad, Umm Sala

| | | |
|-----------------|------------------------------------|--------------------|
| Contractor: | AL WATHNA Enterprises | |
| Consultant: | Clé Millet International Qatar | |
| Client: | Sheikh Faisal Bin Khalifa Al-Thani | |
| Casting Type: | Concrete Slab | 2000m ³ |
| Concrete Grade: | 40MPa OPC | |

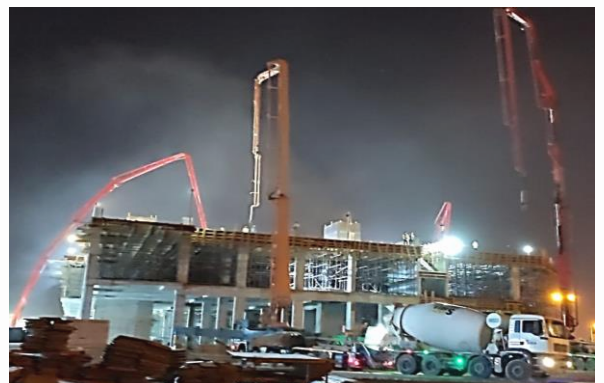

Casting using Tower Placing Boom, Rotary Distributor and Spider Placing Boom

Contractor


Al Huda Engineering Works

Project

Qatar Charity Tower Plot Com 47, Lusail Marina
(2Basment + Ground +26 floor) at Marina COM 47
Phase 2, Lusail

Machinery

Tower Placing Boom

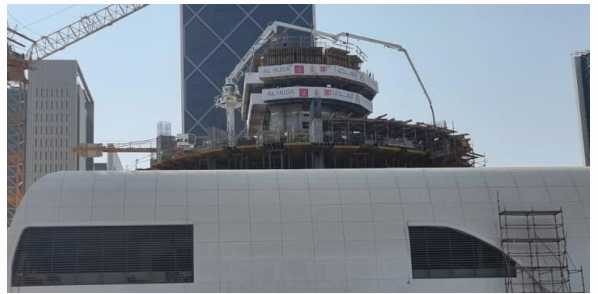

Contractor


Al Huda Engineering Works

Project

Residential Building 3B + G + 15 Storey Plot Pin No.
Marina-Res 012, Lusail City

Machinery

Tower Placing Boom

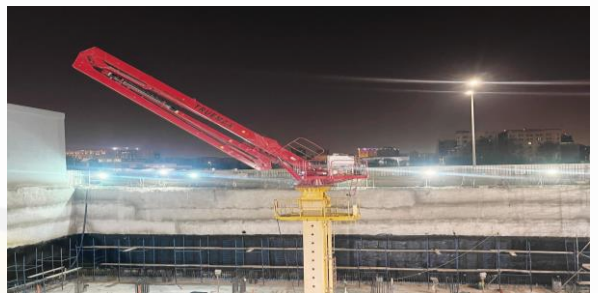

Contractor

Al Darwish Engineering Co, W.L.L.

Project

Shield 1 - L2: Al Zubarah

Duration

24/7 Days Continues Pouring of 500m3

Concrete Grade:

45MPa OPC - Slip Form Concrete



Contractor


Al Bandy Engineering Co, W.L.L.

Project

P145: Al Shahad Tower - Westbay

Machinery

Tower Placing Boom

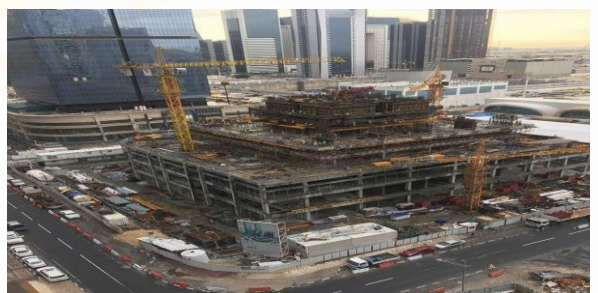

Contractor

Al Bandy Engineering Co, W.L.L.

Project

P105: Al Bustan Complex

Machinery

Rotary Distributor RV10




Casting using Tower Placing Boom, Rotary Distributor and Spider Placing Boom

| | |
|------------|----------------------------------------|
| Contractor | Construction & Reconstruction Eng. Co, |
| Project | Palace of Vendome Mall Lusail |
| Machinery | Spider Placing Boom |



| | |
|------------|------------------------------------|
| Contractor | Al Bandy Engineering Co, W.L.L. |
| Project | Burj Almana Tower - Doha, Corniche |
| Machinery | Spider Placing Boom |

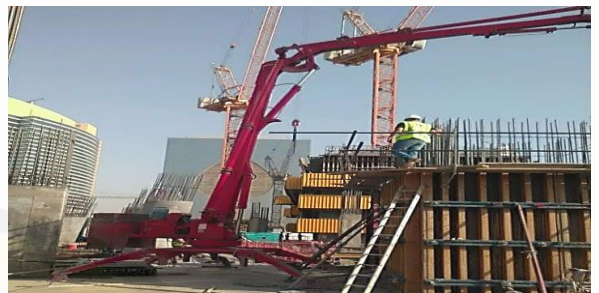

| | |
|------------|---------------------------------------|
| Contractor | Al Bandy Engineering Co, W.L.L. |
| Project | Jumana Tower - The Pearl, Qatar |
| Machinery | Stationary Pump / Spider Placing Boom |



| | |
|------------|-----------------------------------------------|
| Contractor | Al Aali International |
| Project | New Immigration Department - Wadi Al Banat |
| Machinery | Rotary Distributor RV10 / Spider Placing Boom |




| | |
|------------|-------------------------------|
| Contractor | Al Ali Engineering Co, W.L.L. |
| Project | P002: Old Salata Garden Hotel |
| Machinery | Tower Placing Boom |




QNB Building - Old Salata Area, Doha Corniche

| | | |
|---------------|-----------------------------------------|-------------------------------------|
| Contractors: | Corniche Towers Trading and Contracting | |
| Casting Type: | Screed Works | Mobile Pump with Extended Pipelines |

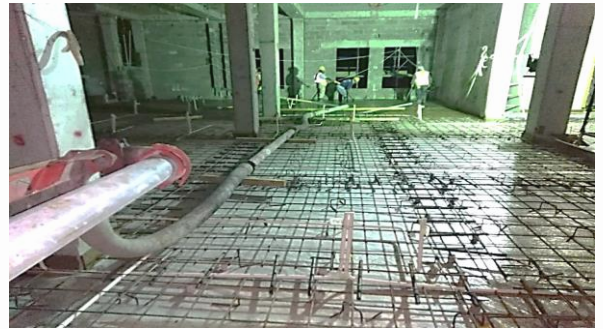

Residential Bldg. 2B + G + P1 + 19F (RES/009) - Marina District, Lusail

| | | |
|---------------|---------------------------------|-----------------------------------------|
| Contractors: | Al Bandy Engineering Co, W.L.L. | |
| Casting Type: | Screed Works | Stationary Pump with Extended Pipelines |

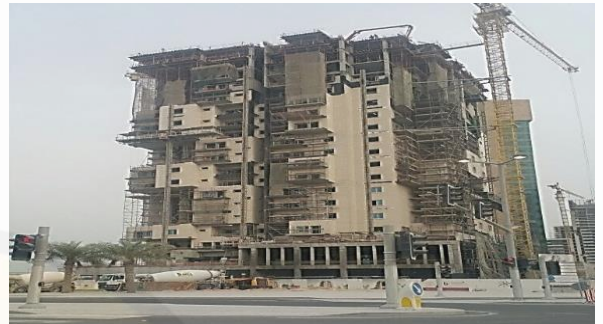

Marina Mix 011 Hotel and Residences - Marina District, Lusail

| | | |
|---------------|---------------------------------|--------------------|
| Contractors: | Al Bandy Engineering Co, W.L.L. | |
| Casting Type: | Screed Works | Extended Pipelines |



Construction, Completion and Maintenance of Salwa Resort - Package 1 - Abu Samra

| | | |
|---------------|-----------------|-------------------|
| Contractors: | CONTRACO W.L.L. | |
| Consultant: | Dar Al Handasah | |
| Casting Type: | Pipeline Works | 500m ³ |



HQ OF GEN. Directorate (New Immigration Department) - Wadi Al Banat, Qatar

| | | |
|-------------|----------------------------|--|
| Contractor: | Al Aali International | |
| Consultant: | CEG International | |
| Client: | MOI - Ministry of Interior | |





13/05/2024 11:17:24 AM

PWA-PVT/0040221/2024
Sender:Public Works Authority
Recipient:Al Sabea for Ready Mix and Blocks

ثروة وطن
FAMILY IS THE TREASURE OF A NATION
القيمة الحقيقية للثروة الوطنية
International Year of the Family (2022)

الأسرة
The Family
القيمة الحقيقية للثروة الوطنية
International Year of the Family (2022)

الأسرة
The Family
القيمة الحقيقية للثروة الوطنية
International Year of the Family (2022)

PWA-PVC-M56,919

Mr. Mohammad Rashid al- maadeed
Chairman
Al Sabea Ready Mix and Block WLL
P.O. Box: 82614 - Doha, Qatar
Fax Number: +974 44438576

Dear Sir,

Subject: Approval of Ready mix Concrete (C15 to C60 - OPC / SRC) as Manufactured by Messrs. Al Sabea Ready Mix and Block WLL in Their Factory Located in Qatar for use in Ashghal Buildings Projects

The Vendors Prequalification Committee (VPC) refers to the application submitted with PWA Reference PVT-PWA/0036007/2024, and your request to include Messrs. Al Sabea Ready Mix and Block WLL as an Ashghal approved manufacturer for Ready mix Concrete (C15 to C60 - OPC / SRC) . Following our general evaluation process, the Committee has decided to approve the concerned material to be used for Ashghal Buildings future projects.

The committee's approval is valid for a period of three (3) years from the date of this letter, and it will be subject to the Authority's review at any time throughout this period. Kindly note that it is the Vendor's responsibility to apply for the renewal three (3) months prior to the expiry date, otherwise the manufacturer will be removed from the Approved List.

The quality and performance of Al Sabea Ready Mix and Block WLL as an Approved Manufacturer shall be closely monitored by the Authority at all times to ensure that the required standards are maintained. If it is found by the Authority at any time that the quality and performance is failing to meet the expected standards, then the committee reserves the right to withdraw their Approval.

السيد/ محمد راشد المعاضيد
الرئيس
الصبيّة للريدي مكس والطابوق ذ.م.م
صندوق بريد: 82614 الدوحة - قطر
فاكس: +974 44438576

تحية طيبة وبعد،،،

الموضوع: الموافقة على إدراج (C15 Ready mix Concrete - OPC / SRC) المصنعة من قبل مصنعهم القائم ببلولة قطر لاستخدامها في مشاريع المباني التابعة لهيئة الأشغال العامة

بالإشارة إلى الطلب المقدم بموجب كتابكم رقم PVT-PWA/0036007/2024 Al Sabea Ready Mix and Block WLL ضمن قائمة مُصنّعي المواد والمنتجات المستخدمة في البنية - (C15 to C60 - OPC / SRC) Ready mix Concrete المتعددين على الهيئة - (C15 to C60 - OPC / SRC) نعتيكم علماً أنه وبعد إجراء عملية التقييم المتعددة والمُتعمّقة لدينا، فقد قررت لجنة تأهيل الشركات المستجيبة والمؤهلة للمواد ومقاولي الباطن الموافقة على إدراج المنتج المعينة ضمن قوائم الهيئة المعتمدة لغايات الاستخدامات في مشاريع المباني المستقبلية.

علماً بأن صلاحية هذه الموافقة سارية لـ (3) سنوات فقط من تاريخه، مع احتفاظ الهيئة بحق المراجعة وإعادة النظر في أي وقت خلال هذه الفترة. وتقع المسؤولية على عاتق الموزع/ المُصنّع لتقديم طلب رسمي لتجديد صلاحية الموافقة قبل تاريخ انتهائها (3) أشهر وإلا فسيتم شطب الشركة من قائمة الموزعين المعتمدين.

ونرجو العلم بأنه سيتم رصد ومراقبة جودة وأداء الشركة Al Sabea Ready Mix and Block WLL من قبل الفريق المختص بالهيئة في جميع الأوقات لضمان الامتثال إلى كافة المعايير القياسية والقواعد الإرشادية. كما أن الهيئة لن تحاسب في سحب الموافقة أو إلغائها في حال انتصح وموزع أو ناقص في أداء الشركة المصنعة أو أي تقصير في استيفاء المعايير المعتمدة والمعمول بها.

عنوان البريد الإلكتروني: +974 4445 0000 الفاكس: +974 4445 0900

P.O. Box: 22188, Doha - Qatar, Tel: +974 4465 0000, Fax: +974 4465 0002

www.ashghal.gov.qa

13/05/2024 11:17:24 AM
PWA-PVT/0040221/2024
Sender:Public Works Authority
Recipient:Al Sabea for Ready Mix and Blocks

ثروة وطن
FARIS IS THE TREASURE OF A NATION
المملكة العربية السعودية - 1432
International Year of the Heritage City (2023)

الأسفة

شركة المشايخ الأخلاص
GATE Overseas The Best

After gaining approval, it is the Al Sabea Ready Mix and Block WLL responsibility to get the material approved from project Supervision Consultants through a project material submittal that ensures full compliance with the PWA requirements and the latest version of Qatar Construction Specifications (QCS) as well as the relevant project specific requirements of that particular project.

This approval shall not be interpreted as a guarantee for providing materials or services for any ASHGHAL projects and the Authority shall not be held responsible nor accept any liability for Manufacturer / Supplier / Subcontractor losses, expenses, damages to reputation or any other damages whatsoever arising out of or in relation to taking part in the authority prequalification procedure.

Yours Sincerely,

وفي حال الحصول على موافقة الهيئة الرسمية، تقع المسؤولية على عاتق Al Sabea Ready Mix and Block WLL لتوريد المواد المعتمدة من قبل الاستشاري المكلّف بالإشراف على المشروع، ويتم ذلك من خلال تقديم المستندات الاعتمادية اللازمة لمواد المشروع للمراجعة والتأكد من استيفاء كافة متطلبات هيئة الأشغال العامة والامتثال إلى أحدث إصدار من "مواصفات قطر للإنشاء" (QCS) بالإضافة للمتطلبات التي يتم تحديدها بحسب طبيعة المشاريع الجاري تنفيذها.

إضافة لما سبق، فلا يجوز تفسير ما ورد أعلاه كموافقة عامة لتتيح توريد المواد أو الخدمات لأي مشروع من مشاريع الهيئة. كما ولا تتحمل الهيئة أي مسؤولية جراء أي خسائر أو نفقات أو أضرار تتكبدها الشركة المصنعة/الموزع/المقاول من الباطن سواء كانت أضراراً قد لحقت بسمعة الشركة أو أي ضرر آخرى ناجمة أو متعلقة بالمشاركة في إجراءات التأهيل المبني الخاصة بالهيئة.

وتفضلوا بقبول فائق الاحترام


مichel حسن المهين
نائب رئيس لجنة التأهيل المبني للموردين
Meshal Hassan M H Al-Dahmane
Vendors Prequalification Committee Vice Chairman

ص.ب. 22188 - الدوحة - قطر. الجوال: 974 4495 0000 ، فاكس: 974 4495 0000

P.O. Box: 22188, Doha - Qatar. Tel: +974 4495 0000, Fax: +974 4495 0000

www.ashghal.gov.qa

Project Consultants and Project Management Approvals

| | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  KHATIB & ALAMI |  ASCO QATAR Consulting Engineers |  KEO كبريتات كيونال كونسلتنس KEO International Consultants |  دورش قطر Dorsch Qatar |
|  AECOM |  Gharnata Consultant Engineers |  ECG مجمع المهندسين الاستشاريين ENGINEERING CONSULTANTS GROUP S.A. |  UNITED ARCHITECTS CONSULTANT FOR ARCHITECTURE DESIGN AND SUPERVISION |
|  PARSONS |  GHD |  dar al-handasah shair and partners |  Dewan Architects + Engineers |
|  KEIC الخليج للاستشارات الهندسية والصناعية ALKHALEJ ENGINEERING & INDUSTRIAL CONSULTANCY |  ATKINS Member of the SNC-Lavalin Group |  erga |  dSG ARCHITECTURAL ENGINEERING CONSULTANCY W.L.L. |
|  CEG INTERNATIONAL |  سيكو CICO |  Eng. Adnan Saffarini Office Architects & Engineering Consultants |  ACG ARCHITECTURAL CONSULTING GROUP مركز الاستشارات المعمارية |
|  al mirqab REAL ESTATE |  EG |  A.E.B. المكتب العربي للشؤون الهندسية Arab Engineering Bureau |  مجموعة الخليج الاستشارية GULF CONSULTING GROUP |
|  JAMES CUBITT & PARTNERS |  fd consult مهندسون • مخططين • مصممين DESIGNERS • ENGINEERS • CONSULTANTS |  EHAF CONSULTING ENGINEERS |  SALFO AND ASSOCIATES SA Engineering & Management Consultants |
|  EGEC إيجك قطر للاستشارات الهندسية EGEC QATAR FOR ENGINEERING CONSULTATIONS W.L.L. |  LUSAIL CONSULTANTS Planners / Architects / Engineers |  Qd |  ALSADD Consulting Engineering |
|  CONSEIL ENGINEERING CONSULTANTS كونسيل للهندسة الاستشارية |  ICON ARCHITECTS & ENGINEERS مهندسون • مخططين • مصممين • استشاريين |  3TI PROJECT Group Projacs |  LEONARDO |
|  LACASA Architects & Engineering Consultants |  WSP |  HTCO HANY TAWFIK CONSULTING OFFICE |  DRA DATA ENGINEERING CONSULTANTS إدارة التصميم الهندسي |
|  KBR |  UNITED CONSULTANTS |  ARAB CONSULTING ENGINEERS MOHARRAM - BAKHOUM |  TRUST ENGINEERS & MANAGEMENT مهندسون • مخططين • مصممين • استشاريين |
|  DCB |  |  MZ & PARTNERS ARCHITECTURAL & ENGINEERING CONSULTANCY |  DIMENSIONS ENGINEERING CONSULTANT دايمانشنز للإستشارات الهندسية |

| | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  قطر تستحق الأفضل Qatar Deserves The Best |  QATARI DiAR الديار |  Alfardan® |  قطيفان للمشاريع QETAIFAN PROJECTS |
|  KAHRA MAA كهرماء |  وقود woqod |  المستشفى الأهلي AL-AHLI HOSPITAL |  AL WAJBA PALACE |
|  LUSAIL |  حمد Hamad |  الهلال الأحمر القطري Qatar Red Crescent |  بنك دخان DUKHAN BANK |
|  SIEMENS |  وزارة الداخلية Ministry of Interior دولة قطر • State of Qatar |  بنك قطر للتنمية QATAR DEVELOPMENT BANK |  QFZ هيئة المناطق الحرة - قطر Qatar Free Zones Authority |
|  البنك الأهلي ahlibank |  |  ALMANA GROUP W.L.L. |  GWC |
|  QATAR القطرية AIRWAYS |  |  Ali Bin Ali GROUP |  شركة يونيون ترست ذ م م UNION TRUST CO. W.L.L. |
|  BARWA بروة |  المكتب الهندسي الخاص Private Engineering Office دولة قطر • State of Qatar |  |  UNITED STATES OF AMERICA EMBASSY DOHA |
|  UDC المتحدة للتنمية UNITED DEVELOPMENT CO. |  DAMAC |  red |  The Montessori Way |
|  قطر مول MALL OF QATAR |  ARIANE |  بن الشيخ القاسم BIN AL SHEIKH HOLDING |  الميرة Al Meera |
|  المنطقة الترفيهية ENTERTAINMENT CITY قطر • Qatar |  ALWAAB CITY |  NBK ناصر بن خالد NASSER BIN KHALED |  BAE SYSTEMS |
|  EZDAN إزدان القابضة HOLDING |  QATAR UNIVERSITY |  الإجارة ALJARAH HOLDING |  قطر الخيرية QATAR CHARITY |
|  ASPIRE ZONE |  ALJAZEERA |  McDonald's |  أوقاف AWQAF الإدارة العامة للأوقاف General Directorate of Endowments |



Our Ref : MOI/W368/LET/ALI /005340
Date : 28th January 2014

Al Ali Engineering Co. WLL
P.O. Box 82614
Doha, State of Qatar

TEL. +974 4443 1533
FAX +974 4443 8576

Attention : Eng'r. Mohammed F.A. Al Daoudi

Dear Sir,

PROJECT : Headquarters of Ministry of Interior at Wadi Al Sail – C-07-027-CN-01
SUBJECT : Letter of Appreciation

This is to acknowledge that **M/s Al Ali Engineering – Sabea Readymix** has been the major supplier of readymix concrete for our project; **Ministry Of Interior Head Quarters at Wadi Al Sail**, where they have supplied a total quantity of more than 150,000m³ of concrete of various grades.

The key part in the supply was **45 MPa Self Compacting Concrete (SCC)**. They have supplied this particular concrete mix a total quantity of more than 10,000m³ including six mass pours having volume of more than 1000m³ /pour. This challenging job was accomplished without any rejection or quality issues.

Thank you.

Yours faithfully,
For and on behalf of WCT Berhad


.....
JAMES ANDREW CHAI
Project Director

175

WCT Berhad (Qatar Branch) – (Commercial Registration No. 31380)
Middle East Regional Office
Muntazah Region, Ibn Sina St., Stanlib Offices, Building No. 40, 2nd Floor, Office No. 203
P. O. Box 200238, Doha, State of Qatar, Tel: +(974) 4427 9780 Fax: +(974) 4427 9781
Email: enquiries@wct.com.my www.wct.com.my

MAIN OFFICE: Industrial Area St. 48 Gate No. 283

| | |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact Name: | Mr. Ravee Sarojini - Production Manager |
| Contact Name Email: | rmshipping@aae.com.qa |
| Contact Name Telephone/Mobile: | +974 5540-4287 / 3339-9568 |
| Location in Google Maps: | Industrial Area St. 48 - Batching Plants: https://www.google.com/maps/place/Sabea+ReadyMix+-Al+Ali+Engineering+ST+48/@25.1658182,51.4451978,17z/data=!3m1!4b1!4m6!3m5!1s0x3e45d14a7f7be2a9b:0x82d8cf3a91aeceb7!8m2!3d25.1658182!4d51.4477727!16s%2Fg%2F11rn76fv1c?authuser=0&entry=ttu 5C8X+84 Doha, Street 48, Doha |

BRANCH NO. 1: Industrial Area St. No. 39 Gate No. 64

| | |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact Name: | Mr. Ravee Sarojini - Production Manager |
| Contact Name Email: | rmshipping@aae.com.qa |
| Contact Name Telephone/Mobile: | +974 5540-4287 / 3339-9568 |
| Location in Google Maps: | Industrial Area St. 49 - Batching Plants: https://www.google.com/maps/place/Sabea+Readymix/@25.172705,51.4337973,17z/data=!3m1!4b1!4m6!3m5!1s0x3e45d14981314df1:0x26eb08343d6ee494!8m2!3d25.172705!4d51.4363722!16s%2Fg%2F11_pxhf42?authuser=0&entry=ttu 5CFP+3G Doha Industrial Area '39, Doha |

BRANCH NO. 2: Abu Glai-La Al Mazrooah

| | |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact Name: | Mr. Anoop Manamadan - Production In-Charge |
| Contact Name Email: | srmazrouah@aae.com.qa |
| Contact Name Telephone/Mobile: | +974 3054-4063 / 3335-8441 |
| Location in Google Maps: | Al Mazrooah, Abu Glai La - Batching Plants: https://www.google.com/maps/place/SABEA+READY+MIX/@25.4822905,51.2792666,17z/data=!3m1!4b1!4m6!3m5!1s0x3e4609ccf04e57df:0xf8868c741ae46de4!8m2!3d25.4822905!4d51.2818415!16s%2Fg%2F11fn798zv6?authuser=0&entry=ttu F7JJ+WP8, Unnamed Road, Wadi Al Waab |

Engr. Mohammad FA L Al Daoudi

General Manager

Tel No: +974 5582-0948

Email: mdawodi@yahoo.com**Operations / Productions****Engr. Aws Mahamoud Zakarneh**

Operations Manager

Mobile: +974 5537-4455

Email: aws@aae.com.qa**Mr. Ravee Sarojini**

Production Manager - Industrial Area

Mobile: +974 3339-9568

Email: rmshipping@aae.com.qa**Mr. Efren Enriquez**

Senior Operations Coordinator

Mobile: +974 5013-6843

Email: eenriquez@aae.com.qa**Technical / Laboratory****Engr. Vinayan V.P. MICT (UK) MSACT**

Technical Manager

Mobile: +974 3301-1710

Email: vinay@aae.com.qa**Engr. Mamdouh Elsayed**

QA/QC Engineer

Mobile: +974 3313-5345

Email: melsayed@aae.com.qa**Mr. Anoop Manamadan**

Shipper - Abu Glai - La Al Mazrooah, Umm Salal

Mobile: +974 3054-4063 / 3335-8441

Email: srmazrouah@aae.com.qa**SABEA Sales Department****Mr. Emad El Telbani**

VIP Sales In-Charge

Mobile: +974 5511-0446 / 3117-9000

Email: emad.eltelbani@gmail.com**Mr. Khalid Sami**

Special Product - Business Manager

Mobile No.: +974 3128-8555

Email: skhalid@aae.com.qa**Mr. Mahmoud Ziyad**

VIP Sales In-Charge

Mobile: +974 5088-8933 / 3119-4666

Email: mziyad@aae.com.qa

شركة الصبىة للردى مكس والطابوق

Main Office: Industrial Area St. 48 Gate No. 283 - P.O. Box: 82614 Doha, Qatar

Branch No. 1: Industrial Area St. No. 39 Gate No. 64

Branch No. 2: Abu Glai-La Al Mazrooah

Tel No.: +974 4492-2452 Fax No.: +974 4443-8576 Email: rmshipping@aae.com.qa / srmazrouah@aae.com.qa